



## > Remote equipment

Catalogue of the  
professional commercial  
refrigeration equipment

Model range 2019



**MXM**  
mariholodmash  
[www.mariholod.com](http://www.mariholod.com)

<b>ABOUT US .....</b>	4
<b>■ 1 REFRIGERATED SHOWCASES</b>	
Parabel.....	9
Valencia.....	19
Everest.....	35
<b>■ 2 WALL SHOWCASES</b>	
Warsaw.....	41
Sofia.....	54
Barcelona.....	59
<b>■ 3 GONDOLAS</b>	
Calypso.....	65
Ritsa.....	69

## ABOUT US



The history of the Marikholodmash trademark dates back to the founding of the commercial machine-building plant in 1941 (evacuated from Kiev) that specialized in the production of shells, shop scales and other shop equipment.

Since 1960, the plant has specialized in the production of commercial refrigeration equipment. It was this plant that produced the first homemade refrigerating cabinets and refrigerating chambers. Over the years, several kinds of commercial refrigeration equipment have been developed and introduced into production.

Our company produced equipment for such facilities as: the Kremlin Palace of Congresses, the Ostankino Tower restaurant, the first Russian self-service shops.

Currently, the Marikholodmash trademark is produced by Contact JSC, which has preserved all the best traditions, improved quality and expanded the product range.

In 2012, the plant launched a new series of medium-temperature refrigerating cabinets under the name of Capri. For their production, a modern metalworking line manufactured by Salvagnini (Italy) and a line for the production of cabinets manufactured by Meccanica NAI (Italy) were mounted and launched.

Besides, the plant manufactures other equipment for trade such as: refrigerated counters, checkout counters, racks, refrigerated showcases and multidecks.

Thanks to the use of modern technologies, the products manufactured by the Contact Plant have:

- high quality;
- reliability and operational convenience;
- modern design;
- competitive price

Besides, the plant manufactures other equipment for trade such as: refrigerated counters, checkout counters, racks, refrigerated showcases and multidecks.

Those who buy our equipment can be sure that they purchase products that meet the most modern requirements and have an excellent price-quality ratio.

The equipment manufactured by Contact, in contrast to most other commercial refrigeration equipment manufacturers, operates at ambient temperature over 35 °C that undoubtedly emphasizes its reliability.

The use of modern powder paints and their application on an automatic programmed painting line provides a beautiful appearance of commercial refrigeration equipment and surface protection against corrosion.

The plant produces electroplating parts on the Italian automated programmed line.

The complete safety of commercial refrigeration equipment during loading, transportation and storage is guaranteed by specially designed packaging.



# REFRIGERATED SHOWCASES

## REFRIGERATED SHOWCASES «PARABEL»

This is a series of commercial refrigeration equipment for remote refrigeration: medium-temperature, low-temperature and universal showcases with a storeroom.

For equipping shops with commercial refrigeration equipment we can offer medium-temperature angular modules (external and internal angle) allowing you to build cooling lines of any configuration.

The section of the Parabel showcase with a glass lifting mechanism for remote refrigeration.

- lamp and countertop are made of stainless steel;
- polished stainless steel trays;
- curved tempered glass opening upwards;
- storeroom;
- protective bumper







«PARABEL» VHS	VHS 1,25	VHSn 1,25
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	1,05	
useful refrigerated capacity, m <sup>3</sup>	0,23	
availability of depository	yes	
daily electric energy consumption, kWh	1,7	2,6
width, mm	1250	
depth, mm	1075	
height, mm	1200	

**Logistic information**



net, kg ..... VHS 115; VHSn 120  
 gross, kg ..... VHS 250; VHSn 255  
 packing width, mm ..... 1520  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

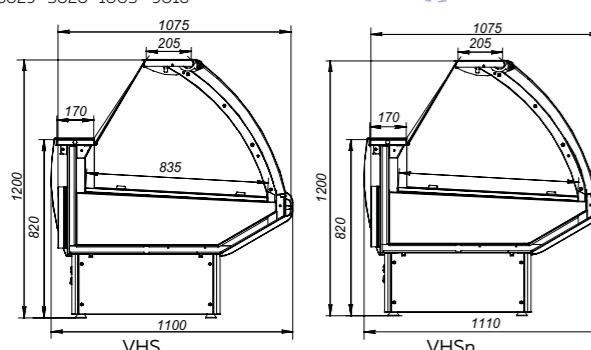

«PARABEL» VHS	VHS 1,875	VHSn 1,875
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	1,58	
useful refrigerated capacity, m <sup>3</sup>	0,35	
availability of depository	yes	
daily electric energy consumption, kWh	3,26	4,37
width, mm	1875	
depth, mm	1075	
height, mm	1200	

**Logistic information**



net, kg ..... VHS 155; VHSn 160  
 gross, kg ..... VHS 300; VHSn 305  
 packing width, mm ..... 2150  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

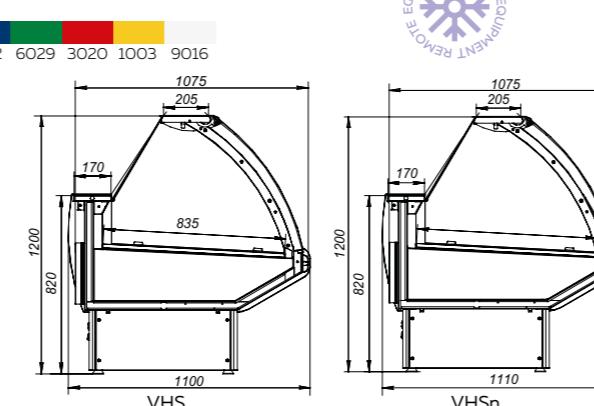

«PARABEL» VHS	VHS 2,5	VHSn 2,5
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	2,1	
useful refrigerated capacity, m <sup>3</sup>	0,46	
availability of depository	yes	
daily electric energy consumption, kWh	3,24	6,6
width, mm	2500	
depth, mm	1075	
height, mm	1200	

**Logistic information**



net, kg ..... VHS 180; VHSn 185  
 gross, kg ..... VHS 410; VHSn 420  
 packing width, mm ..... 2770  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

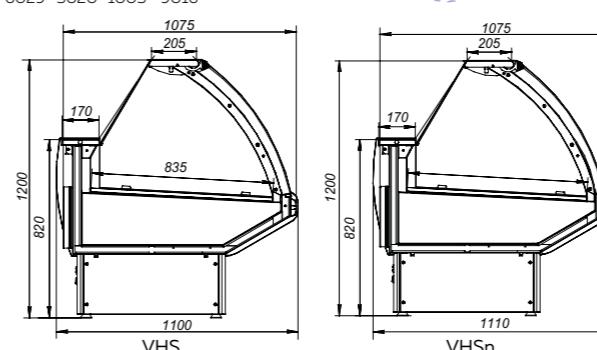

«PARABEL» VHS	VHS 3,75	VHSn 3,75
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	3,15	
useful refrigerated capacity, m <sup>3</sup>	0,69	
availability of depository	yes	
daily electric energy consumption, kWh	4,99	6,67
width, mm	3750	
depth, mm	1075	
height, mm	1200	

**Logistic information**

net, kg ..... VHS 270; VHSn 280  
 gross, kg ..... VHS 480; VHSn 490  
 packing width, mm ..... 4205  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

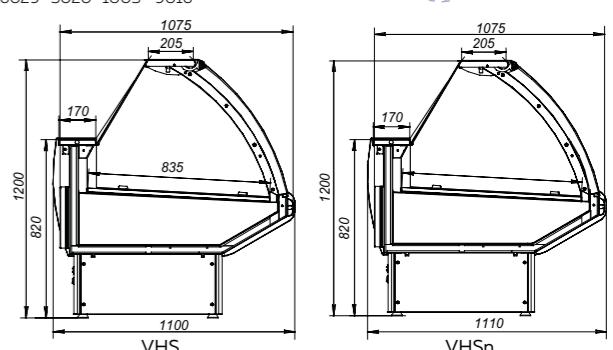




	VHS UV	VHSn UV
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	1,24	
useful refrigerated capacity, m <sup>3</sup>	0,29	
availability of depository	yes	
daily electric energy consumption, kWh	1,85	2,0
width, mm	1435	
depth, mm	1435	
height, mm	1200	

**Logistic information**


net, kg ..... VHS 120; VHSn 130  
 gross, kg ..... VHS 250; VHSn 260  
 packing width, mm ..... 1670  
 packing depth, mm ..... 1670  
 packing height, mm ..... 1120

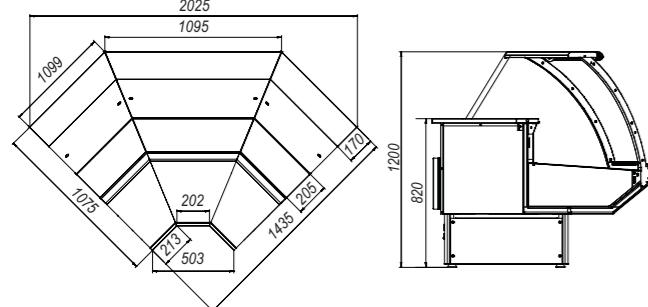

	VHS UN	VHSn UN
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	1,25	
useful refrigerated capacity, m <sup>3</sup>	0,19	
availability of depository	no	
daily electric energy consumption, kWh	1,85	2,5
width, mm	1410	
depth, mm	1410	
height, mm	1200	

**Logistic information**



net, kg ..... VHS 120; VHSn 130  
 gross, kg ..... VHS 250; VHSn 260  
 packing width, mm ..... 1670  
 packing depth, mm ..... 1670  
 packing height, mm ..... 1120

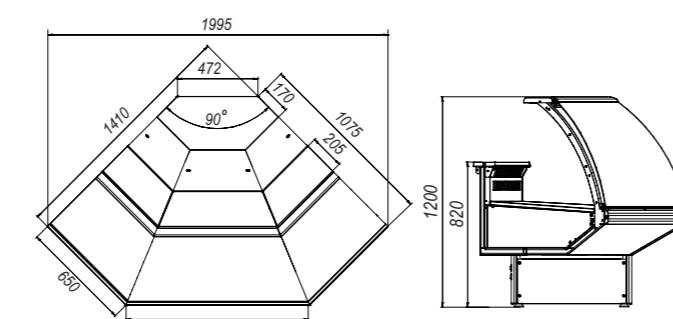

	VHSd
cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	835
refrigerated trays and shelves area, m <sup>2</sup>	1,05
useful refrigerated capacity, m <sup>3</sup>	0,23
availability of depository	no
daily electric energy consumption, kWh	1,7
width, mm	1250
depth, mm	1120
height, mm	1200

**Logistic information**


net, kg ..... 135  
 gross, kg ..... 270  
 packing width, mm ..... 1520  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

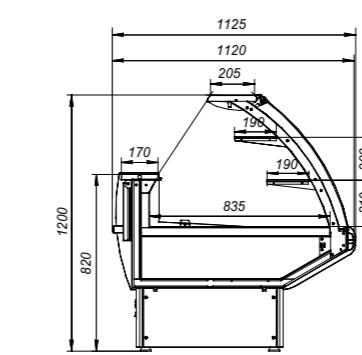

	VHN
cooled volume temperature, °C	-18
at ambient temperature, °C	+12...+25
display depth, mm	835
refrigerated trays and shelves area, m <sup>2</sup>	1,05
useful refrigerated capacity, m <sup>3</sup>	0,16
availability of depository	no
daily electric energy consumption, kWh	3,7
width, mm	1250
depth, mm	1075
height, mm	1200

**Logistic information**

net, kg ..... 125  
 gross, kg ..... 260  
 packing width, mm ..... 1520  
 packing depth, mm ..... 1200  
 packing height, mm ..... 1120

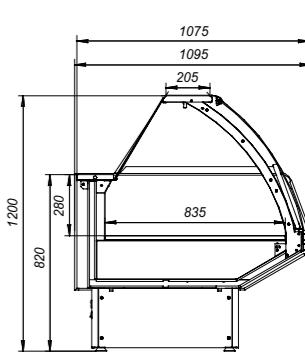




«PARABEL» VHN		1,875
cooled volume temperature, °C		-18
at ambient temperature, °C		+12...+25
display depth, mm		835
refrigerated trays and shelves area, m <sup>2</sup>		1,58
useful refrigerated capacity, m <sup>3</sup>		0,24
availability of depository		no
daily electric energy consumption, kWh		4,8
width, mm		1875
depth, mm		1075
height, mm		1200

## Logistic information



net, kg .....	190
gross, kg.....	340
packing width, mm.....	2150
packing depth, mm .....	1200
packing height, mm .....	1120



«PARABEL» VHSо	VHSо 1,25	VHSно 1,25
cooled volume temperature, °C	0...+7	-2...+5
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	1,05	
useful refrigerated capacity, m <sup>3</sup>	0,23	
availability of depository	yes	
daily electric energy consumption, kWh	1,25	
width, mm	1250	
depth, mm	1075	
height, mm	885	

## Logistic information



net, kg .....	95
gross, kg.....	225
packing width, mm.....	1520
packing depth, mm .....	1200
packing height, mm .....	1120



«PARABEL» VHSо		VHSо 1,875	VHSно 1,875
cooled volume temperature, °C		0...+7	-2...+5
at ambient temperature, °C		+12...+25	
display depth, mm		835	
refrigerated trays and shelves area, m <sup>2</sup>		1,58	
useful refrigerated capacity, m <sup>3</sup>		0,35	
availability of depository		yes	
daily electric energy consumption, kWh		2,0	
width, mm		1875	
depth, mm		1075	
height, mm		885	

## Logistic information


net, kg .....	145
gross, kg.....	290
packing width, mm.....	2150
packing depth, mm .....	1200
packing height, mm .....	1120



«PARABEL» VHSо		2,5
cooled volume temperature, °C		0...+7
ambient temperature, °C		+12...+25
display depth, mm		835
refrigerated trays and shelves area, m <sup>2</sup>		2,1
useful refrigerated capacity, m <sup>3</sup>		0,46
availability of depository		yes
daily electric energy consumption, kWh		1,97
width, mm		2500
depth, mm		1075
height, mm		885

#### Logistic information

Net, kg .....	170
Gross, kg.....	405
Packing width, mm.....	2770
Packing depth, mm .....	1200
Packing height, mm .....	1120





<b>«PARABEL» VHSI «fish on ice»</b>		<b>1,25</b>
cooled volume temperature, °C	-5...0	
at ambient temperature, °C	+12...+25	
display depth, mm	820	
refrigerated trays and shelves area, m <sup>2</sup>	1,05	
useful refrigerated capacity, m <sup>3</sup>	0,23	
availability of depository	no	
daily electric energy consumption, kWh	3,26	
width, mm	1250	
depth, mm	1075	
height, mm	1200	

**Logistic information**

net, kg .....	125
gross, kg.....	260
packing width, mm.....	1520
packing depth, mm.....	1200
packing height, mm .....	1120



RAL  
5002 6029 3020 1003 9016




<b>«PARABEL» VHSIo «fish on ice»</b>		<b>1,25</b>
cooled volume temperature, °C	-2...+5	
at ambient temperature, °C	+12...+25	
display depth, mm	820	
refrigerated trays and shelves area, m <sup>2</sup>	1,05	
useful refrigerated capacity, m <sup>3</sup>	0,23	
availability of depository	no	
daily electric energy consumption, kWh	3,26	
width, mm	1250	
depth, mm	1075	
height, mm	885	

**Logistic information**

net, kg .....	95
gross, kg.....	225
packing width, mm.....	1520
packing depth, mm.....	1200
packing height, mm .....	1120



RAL  
5002 6029 3020 1003 9016

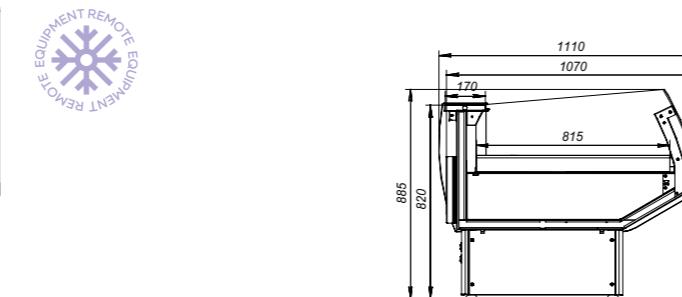


<b>«PARABEL» VHSO</b>		<b>3,75</b>
cooled volume temperature, °C	0...+7	
at ambient temperature, °C	+12...+25	
display depth, mm	835	
refrigerated trays and shelves area, m <sup>2</sup>	3,15	
useful refrigerated capacity, m <sup>3</sup>	0,69	
availability of depository	yes	
daily electric energy consumption, kWh	2,67	
width, mm	3750	
depth, mm	1075	
height, mm	885	

**Logistic information**

net, kg .....	215
gross, kg.....	425
packing width, mm.....	4205
packing depth, mm.....	1200
packing height, mm .....	1120



RAL  
5002 6029 3020 1003 9016

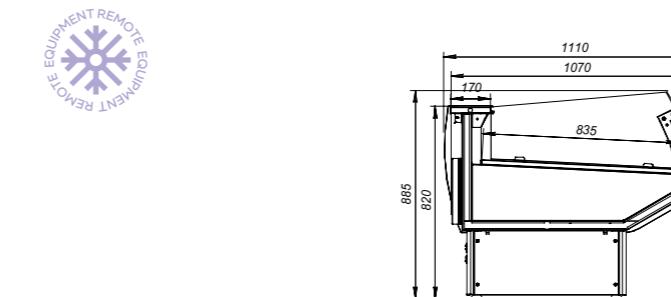



## REFRIGERATED SHOWCASES «VALENCIA»

It is intended for display, short-term storage and sale of food products, including semi-finished products, pre-cooled to the temperature of the cooled volume, at the trade and public catering facilities.


A thermal showcase is intended for display, short-term storage and sale of ready hot meals at the trade and public catering facilities. Under each food storage container, there is a tubular electric heater for maintaining food warm.



«VALENCIA» VHS	VHS 1,25	VHSn 1,25
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	1,10	
useful refrigerated capacity, m <sup>3</sup>	0,13	
availability of depository	no	
daily electric energy consumption, kWh	3,3	
width without sidewall, mm	1570	
depth without sidewall, mm	1150	
height, mm	1275	

## Logistic information



net, kg	160
gross, kg	270
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550

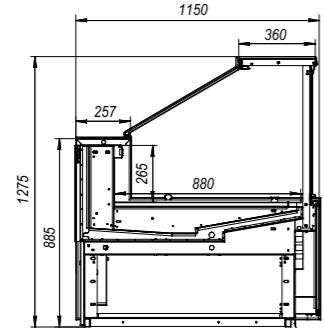

«VALENCIA» VHS	VHS 1,875	VHSn 1,875
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	1,65	
useful refrigerated capacity, m <sup>3</sup>	0,25	
availability of depository	no	
daily electric energy consumption, kWh	4,6	
width without sidewall, mm	1875	
depth without sidewall, mm	1150	
height, mm	1275	

## Logistic information


net, kg	240
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550



«VALENCIA» VHS	VHS 2,5	VHSn 2,5
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	2,20	
useful refrigerated capacity, m <sup>3</sup>	0,33	
availability of depository	no	
daily electric energy consumption, kWh	6,3	
width without sidewall, mm	2500	
depth without sidewall, mm	1150	
height, mm	1275	

## Logistic information


net, kg	320
gross, kg	380
packing width, mm	2790
packing depth, mm	1300
packing height, mm	1550

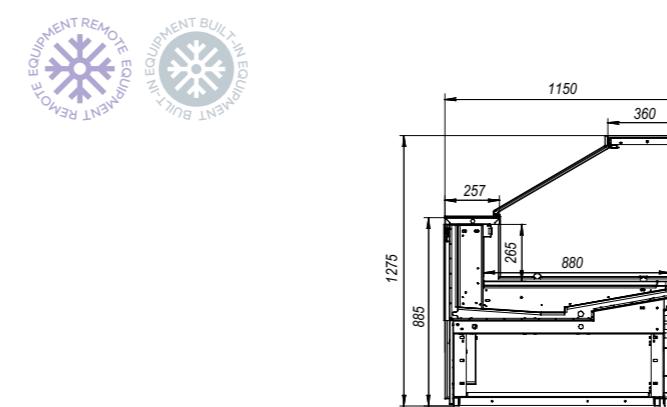

«VALENCIA» VHS	VHS 3,75	VHSn 3,75
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	3,30	
useful refrigerated capacity, m <sup>3</sup>	0,50	
availability of depository	no	
daily electric energy consumption, kWh	7,8	
width without sidewall, mm	3750	
depth without sidewall, mm	1150	
height, mm	1275	

## Logistic information

net, kg	480
gross, kg	550
packing width, mm	4050
packing depth, mm	1300
packing height, mm	1550

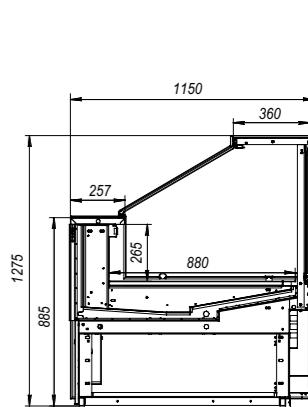





«VALENCIA» VHSo	VHSo 1,25	VHSno 1,25
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	1,10	
useful refrigerated capacity, m <sup>3</sup>	0,17	
availability of depository	no	
daily electric energy consumption, kWh	2,6	
width without sidewall, mm	1250	
depth without sidewall, mm	1150	
height, mm	900	

**Logistic information**

net, kg	90
gross, kg	220
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550

**Logistic information**



net, kg	145
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550



«VALENCIA» VHSo	VHSo 2,5	VHSno 2,5
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	2,2	
useful refrigerated capacity, m <sup>3</sup>	0,33	
availability of depository	no	
daily electric energy consumption, kWh	4,1	
width without sidewall, mm	2500	
depth without sidewall, mm	1150	
height, mm	900	

**Logistic information**


net, kg	190
gross, kg	340
packing width, mm	2790
packing depth, mm	1300
packing height, mm	1550

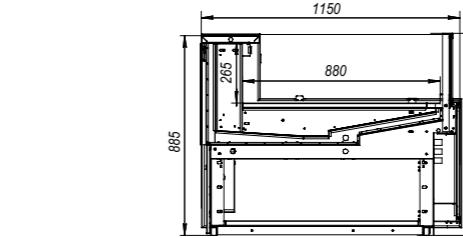

«VALENCIA» VHSo	VHSo 3,75	VHSno 3,75
cooled volume temperature, °C	0...+7	-5...+5
at ambient temperature, °C	+12...+25	
display depth, mm	880	
refrigerated trays and shelves area, m <sup>2</sup>	3,3	
useful refrigerated capacity, m <sup>3</sup>	0,50	
availability of depository	no	
daily electric energy consumption, kWh	5,7	
width without sidewall, mm	3750	
depth without sidewall, mm	1150	
height, mm	900	

**Logistic information**

net, kg	290
gross, kg	480
packing width, mm	4050
packing depth, mm	1300
packing height, mm	1550





**«VALENCIA» VHSI**
**1,25**

cooled volume temperature, °C	-5...0
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	0,96
useful refrigerated capacity, m <sup>3</sup>	0,10
availability of depository	no
daily electric energy consumption, kWh	2,6
width without sidewall, mm	1250
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	160
gross, kg	270
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550


**«VALENCIA» VHSI**
**1,875**

cooled volume temperature, °C	-5...0
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	1,48
useful refrigerated capacity, m <sup>3</sup>	0,15
availability of depository	no
daily electric energy consumption, kWh	3,2
width without sidewall, mm	1875
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	240
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550


**«VALENCIA» VHSI**
**2,5**

cooled volume temperature, °C	-5...0
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	1,99
useful refrigerated capacity, m <sup>3</sup>	0,20
availability of depository	no
daily electric energy consumption, kWh	4,9
width without sidewall, mm	2500
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	320
gross, kg	380
packing width, mm	2790
packing depth, mm	1300
packing height, mm	1550

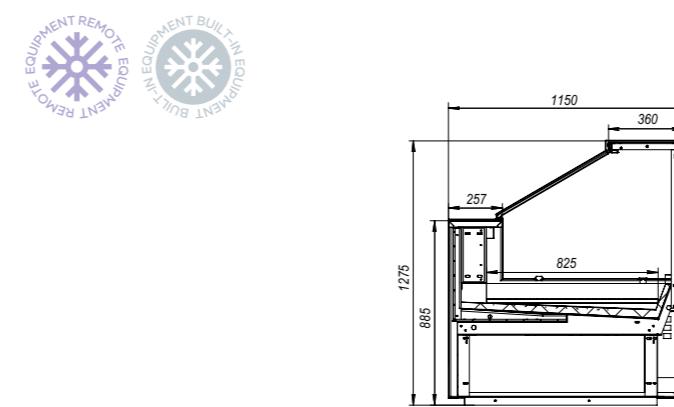
**«VALENCIA» VHSnM**
**1,25**

cooled volume temperature, °C	-5...+5
at ambient temperature, °C	+12...+25
display depth, mm	850
refrigerated trays and shelves area, m <sup>2</sup>	1,05
useful refrigerated capacity, m <sup>3</sup>	0,11
availability of depository	no
daily electric energy consumption, kWh	2,6
width without sidewall, mm	1250
depth without sidewall, mm	1150
height, mm	1275

## Logistic information

net, kg	160
gross, kg	270
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550




**«VALENCIA» VHSnM****1,875**

cooled volume temperature, °C	-5...+5
at ambient temperature, °C	+12...+25
display depth, mm	850
refrigerated trays and shelves area, m <sup>2</sup>	1,58
useful refrigerated capacity, m <sup>3</sup>	0,16
availability of depository	no
daily electric energy consumption, kWh	3,2
width without sidewall, mm	1875
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	240
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550

**«VALENCIA» VHSnM****2,5**

cooled volume temperature, °C	-5...+5
at ambient temperature, °C	+12...+25
display depth, mm	850
refrigerated trays and shelves area, m <sup>2</sup>	2,11
useful refrigerated capacity, m <sup>3</sup>	0,21
availability of depository	no
daily electric energy consumption, kWh	4,9
width without sidewall, mm	2500
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	320
gross, kg	380
packing width, mm	2790
packing depth, mm	1300
packing height, mm	1550

**«VALENCIA» VHSlo****1,25**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	0,96
useful refrigerated capacity, m <sup>3</sup>	0,10
availability of depository	no
daily electric energy consumption, kWh	1,9
width without sidewall, mm	1250
depth without sidewall, mm	1150
height, mm	900

## Logistic information


net, kg	95
gross, kg	220
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550

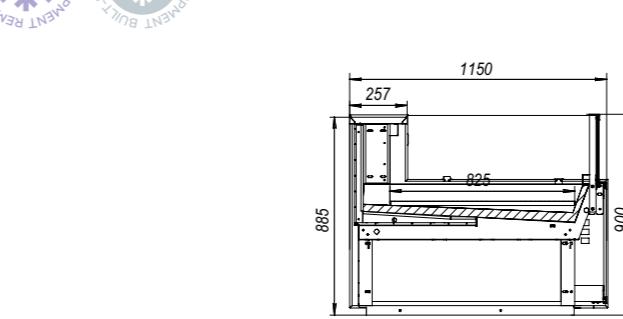**«VALENCIA» VHSlo****1,875**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	1,48
useful refrigerated capacity, m <sup>3</sup>	0,15
availability of depository	no
daily electric energy consumption, kWh	2,5
width without sidewall, mm	1875
depth without sidewall, mm	1150
height, mm	900

## Logistic information

net, kg	240
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550





**«VALENCIA» VHSIo**

2,5

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	825
refrigerated trays and shelves area, m <sup>2</sup>	1,99
useful refrigerated capacity, m <sup>3</sup>	0,20
availability of depository	no
daily electric energy consumption, kWh	2,8
width without sidewall, mm	2500
depth without sidewall, mm	1150
height, mm	900


## Logistic information

net, kg	190
gross, kg	340
packing width, mm	2790
packing depth, mm	1200
packing height, mm	1550



## Logistic information

net, kg	190
gross, kg	230
packing width, mm	1570
packing depth, mm	1570
packing height, mm	1550

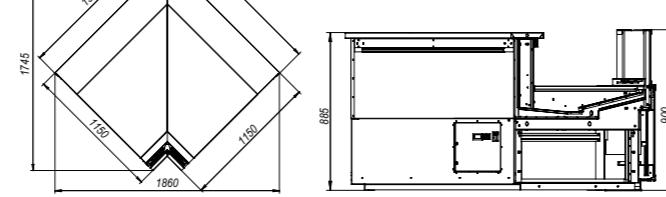

**«VALENCIA» VHS UV**

0...+7

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	880
refrigerated trays and shelves area, m <sup>2</sup>	1,19
useful refrigerated capacity, m <sup>3</sup>	0,18
availability of depository	no
daily electric energy consumption, kWh	1,7
width without sidewall, mm	1320
depth without sidewall, mm	1320
height, mm	900

## Logistic information

net, kg	190
gross, kg	290
packing width, mm	1570
packing depth, mm	1570
packing height, mm	1550

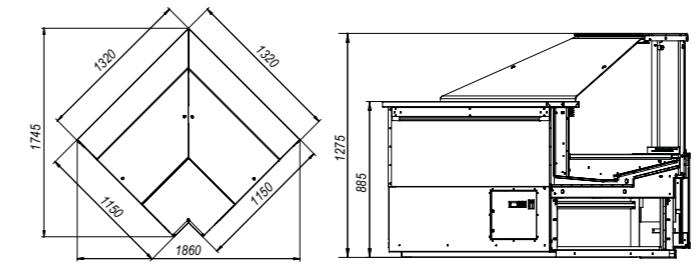

**«VALENCIA» VHS UN**

0...+7

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	880
refrigerated trays and shelves area, m <sup>2</sup>	1,19
useful refrigerated capacity, m <sup>3</sup>	0,18
availability of depository	no
daily electric energy consumption, kWh	2,4
width without sidewall, mm	1320
depth without sidewall, mm	1320
height, mm	1275

## Logistic information

net, kg	240
gross, kg	320
packing width, mm	1930
packing depth, mm	1880
packing height, mm	1550

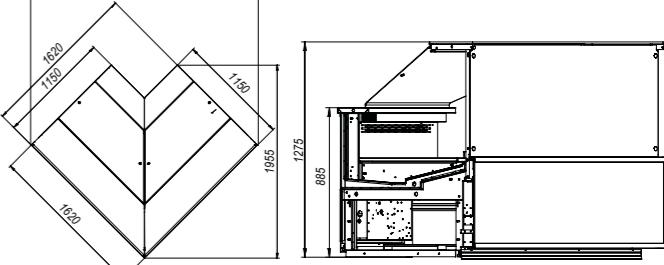


**«VALENCIA» VHSo UN**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	880
refrigerated trays and shelves area, m <sup>2</sup>	1,88
useful refrigerated capacity, m <sup>3</sup>	0,28
availability of depository	no
daily electric energy consumption, kWh	3,4
width without sidewall, mm	1620
depth without sidewall, mm	1620
height, mm	900

## Logistic information


net, kg	210
gross, kg	250
packing width, mm	1930
packing depth, mm	1880
packing height, mm	1550

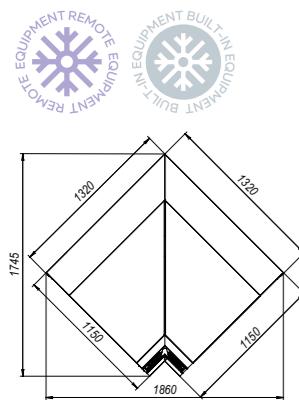**«VALENCIA» VHN**

cooled volume temperature, °C	-18...-12
at ambient temperature, °C	+12...+25
display depth, mm	830
refrigerated trays and shelves area, m <sup>2</sup>	1,04
useful refrigerated capacity, m <sup>3</sup>	0,16
availability of depository	no
daily electric energy consumption, kWh	6,0
width without sidewall, mm	1250
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	160
gross, kg	270
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550

**«VALENCIA» VHN**

cooled volume temperature, °C	-18...-12
at ambient temperature, °C	+12...+25
display depth, mm	830
refrigerated trays and shelves area, m <sup>2</sup>	1,56
useful refrigerated capacity, m <sup>3</sup>	0,23
availability of depository	no
daily electric energy consumption, kWh	8,0
width without sidewall, mm	1875
depth without sidewall, mm	1150
height, mm	1275

## Logistic information


net, kg	240
gross, kg	310
packing width, mm	2200
packing depth, mm	1300
packing height, mm	1550

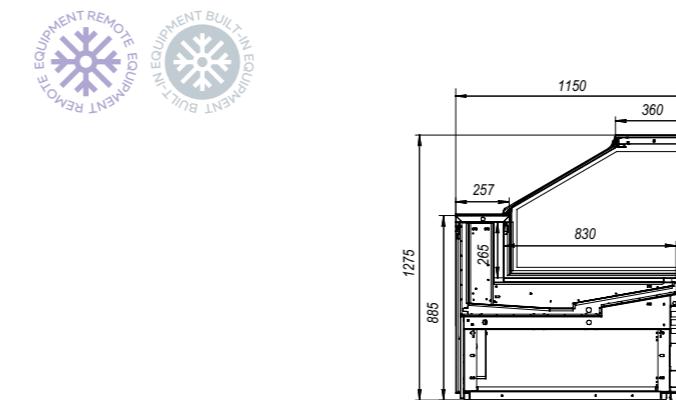**«VALENCIA» VT**

cooled volume temperature, °C	+50...+65
at ambient temperature, °C	+12...+25
capacity: 9 containers	1/2x2,5 65x265x325
display area, m <sup>2</sup>	0,78
availability of depository	no
daily electric energy consumption, kWh	28,8
width without sidewall, mm	1250
depth without sidewall, mm	1150
height, mm	1275

## Logistic information

net, kg	160
gross, kg	270
packing width, mm	1570
packing depth, mm	1300
packing height, mm	1550

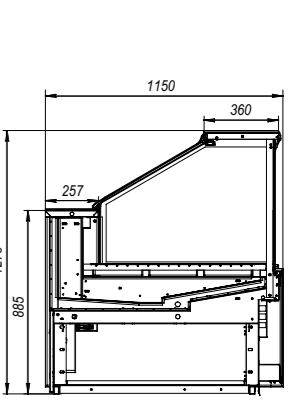

## REFRIGERATED SHOWCASES «VALENCIA»



### «VALENCIA» VT

	1,875
cooled volume temperature, °C	+50...+65
at ambient temperature, °C	+12...+25
capacity: 9 containers	1/2x2,5 65x265x325
display area, m <sup>2</sup>	1,29
availability of depository	no
daily electric energy consumption, kWh	40,9
width without sidewall, mm	1875
depth without sidewall, mm	1150
height, mm	1275

#### Logistic information

net, kg .....	240
gross, kg.....	310
packing width, mm.....	2200
packing depth, mm.....	1300
packing height, mm .....	1550





#### Logistic information

net, kg .....	320
gross, kg.....	380
packing width, mm.....	2790
packing depth, mm.....	1300
packing height, mm .....	1550



EQUIPMENT BUILT-IN  
EQUIPMENT BUILT-IN  
EQUIPMENT BUILT-IN



## REFRIGERATED SHOWCASES «EVEREST»

It is intended for display, short-term storage and sale of food products, including semi-finished products, pre-cooled to the temperature of the cooled volume, at the trade and public catering facilities.






<b>«EVEREST» VHN</b>	
	<b>1,875</b>
cooled volume temperature, °C	maximum -20
at ambient temperature, °C	+12...+25
display depth, mm	319/843
refrigerated trays and shelves area, m <sup>2</sup>	4,4
useful refrigerated capacity, m <sup>3</sup>	0,54/0,62
availability of depository	no
daily electric energy consumption, kWh	13,5/9,9
width, mm	1875
depth, mm	1190
height, mm	2090

<b>«EVEREST» VHN</b>	
	<b>2,5</b>
cooled volume temperature, °C	maximum -20
at ambient temperature, °C	+12...+25
display depth, mm	319/843
refrigerated trays and shelves area, m <sup>2</sup>	5,9
useful refrigerated capacity, m <sup>3</sup>	0,72/0,83
availability of depository	no
daily electric energy consumption, kWh	17,9/13,6
width, mm	2500
depth, mm	1190
height, mm	2090

<b>«EVEREST» VHN</b>	
	<b>3,75</b>
cooled volume temperature, °C	maximum -20
at ambient temperature, °C	+12...+25
display depth, mm	319/843
refrigerated trays and shelves area, m <sup>2</sup>	8,9
useful refrigerated capacity, m <sup>3</sup>	1,08/1,25
availability of depository	no
daily electric energy consumption, kWh	26,3/19,9
width, mm	3750
depth, mm	1190
height, mm	2090


Logistic information

net, kg	475	
gross, kg	590	
packing width, mm	2145	
packing depth, mm	1300	
packing height, mm	2345	

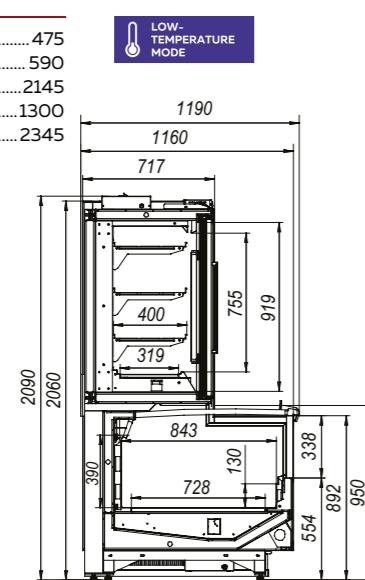


Logistic information

net, kg	560	
gross, kg	740	
packing width, mm	2770	
packing depth, mm	1300	
packing height, mm	2345	

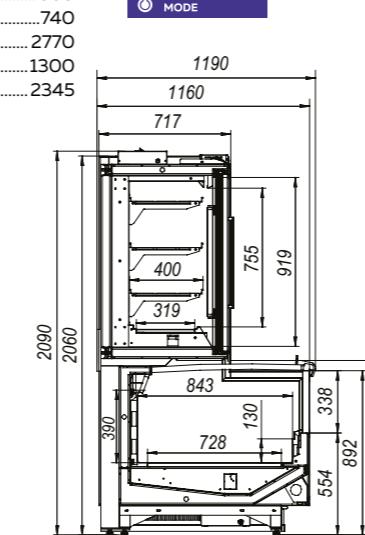

Logistic information

net, kg	840	
gross, kg	1080	
packing width, mm	4020	
packing depth, mm	1300	
packing height, mm	2345	

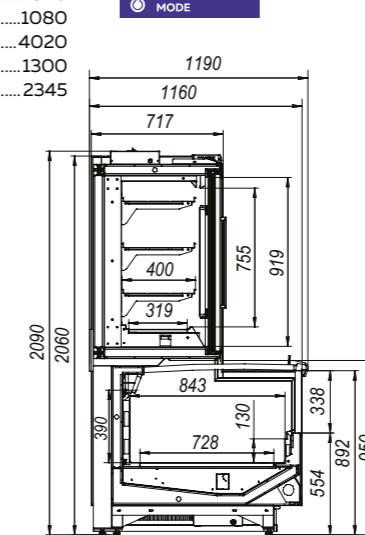



# WALL SHOWCASES

## WALL SHOWCASES «WARSAW»



The Warsaw refrigerated wall showcase is ideal for display, short-term storage and sale of food products at the trade and public catering facilities of any format. The angle of inclination of the shelves can be adjusted at 0°, -10° and -20°.

The Warsaw showcase has a forced air circulation, which provides quick uniform cooling, and increased shelf space of 30% in comparison with multidecks with a built-in unit. The lower position of the evaporator provides a multideck minimum depth of 660 mm allowing you to use it in small supermarkets.

All standard sizes of the Warsaw wall showcase are delivered disassembled in wooden packaging that allows reducing the cost of delivery by 3 times and installing the showcase in facilities with any doorways.

**«WARSAW» 210/66 VHS<sup>p</sup>****1,25**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	5x400+420
refrigerated trays and shelves area, m <sup>2</sup>	2,9
useful refrigerated capacity, m <sup>3</sup>	0,86
daily electric energy consumption, kWh	1,8
width, mm	1250
depth, mm	660
height, mm	2100


**Logistic information**

net, kg .....	110
gross, kg.....	195
packing width, mm.....	1520
packing depth, mm.....	1120
packing height, mm .....	2360

RAL  
5002 6029 3020 1003 9016

**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

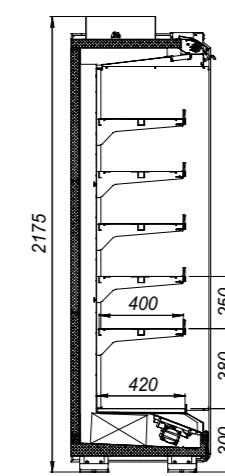**«WARSAW» 210/66 VHS<sup>p</sup>****1,875**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	5x400+420
refrigerated trays and shelves area, m <sup>2</sup>	4,4
useful refrigerated capacity, m <sup>3</sup>	1,29
daily electric energy consumption, kWh	2,6
width, mm	1875
depth, mm	660
height, mm	2100


**Logistic information**

net, kg .....	165
gross, kg.....	270
packing width, mm.....	2150
packing depth, mm.....	1120
packing height, mm .....	2360

RAL  
5002 6029 3020 1003 9016



- Complementary options:**
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

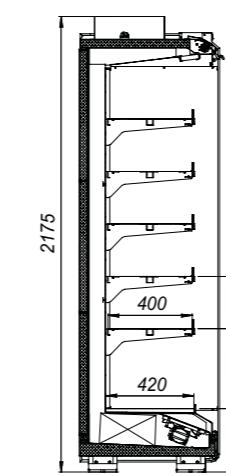**«WARSAW» 210/66 VHS<sup>p</sup>****2,5**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	5x400+420
refrigerated trays and shelves area, m <sup>2</sup>	5,9
useful refrigerated capacity, m <sup>3</sup>	1,72
daily electric energy consumption, kWh	3,4
width, mm	2500
depth, mm	660
height, mm	2100


**Logistic information**

net, kg .....	225
gross, kg.....	350
packing width, mm.....	2770
packing depth, mm.....	1120
packing height, mm .....	2360

RAL  
5002 6029 3020 1003 9016



- Complementary options:**
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

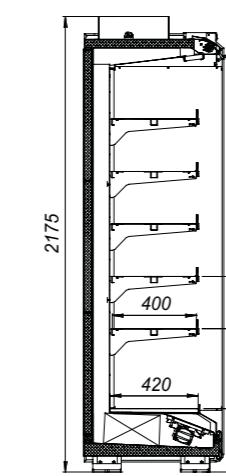**«WARSAW» 210/66 VHS<sup>p</sup>****3,75**

cooled volume temperature, °C	0...+7
at ambient temperature, °C	+12...+25
display depth, mm	5x400+420
refrigerated trays and shelves area, m <sup>2</sup>	8,0
useful refrigerated capacity, m <sup>3</sup>	2,58
daily electric energy consumption, kWh	5,0
width, mm	3750
depth, mm	660
height, mm	2100


**Logistic information**

net, kg .....	490
gross, kg.....	4020
packing width, mm.....	1120
packing depth, mm.....	2360

RAL  
5002 6029 3020 1003 9016



- Complementary options:**
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

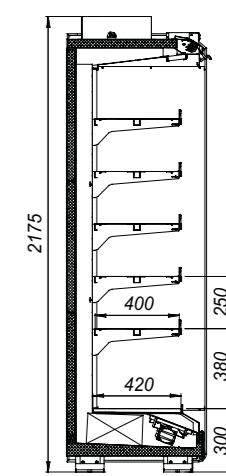




	VHSp 1,25	VHSnp 1,25
cooled volume temperature, °C	+1...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+640	
refrigerated trays and shelves area, m <sup>2</sup>	4,0	
useful refrigerated capacity, m <sup>3</sup>	1,09	
daily electric energy consumption, kWh	1,6	3,6
width without sidewall, mm	1250	
depth without sidewall, mm	935	
height without sidewall, mm	2110	

**Logistic information**

net, kg .....	150
gross, kg.....	280
packing width, mm.....	1750
packing depth, mm.....	1200
packing height, mm .....	800


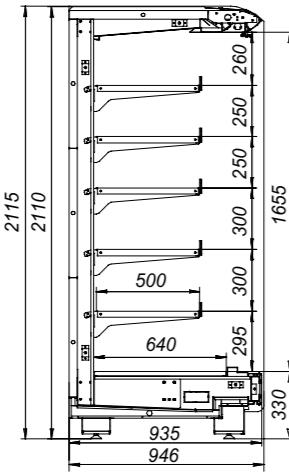
**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

	VHSp 1,875	VHSnp 1,875
cooled volume temperature, °C	+1...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+640	
refrigerated trays and shelves area, m <sup>2</sup>	6,0	
useful refrigerated capacity, m <sup>3</sup>	1,63	
daily electric energy consumption, kWh	2,7	4,1
width without sidewall, mm	1875	
depth without sidewall, mm	935	
height without sidewall, mm	2110	

**Logistic information**

net, kg .....	230
gross, kg.....	340
packing width, mm.....	2110
packing depth, mm.....	1200
packing height, mm .....	800

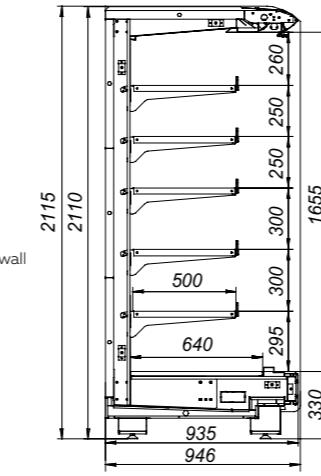
**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

	VHSp 2,5	VHSnp 2,5
cooled volume temperature, °C	+1...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+640	
refrigerated trays and shelves area, m <sup>2</sup>	8,0	
useful refrigerated capacity, m <sup>3</sup>	2,17	
daily electric energy consumption, kWh	2,9	4,9
width without sidewall, mm	2500	
depth without sidewall, mm	935	
height without sidewall, mm	2110	

**Logistic information**

net, kg .....	315
gross, kg.....	420
packing width, mm.....	2750
packing depth, mm.....	1200
packing height, mm .....	800

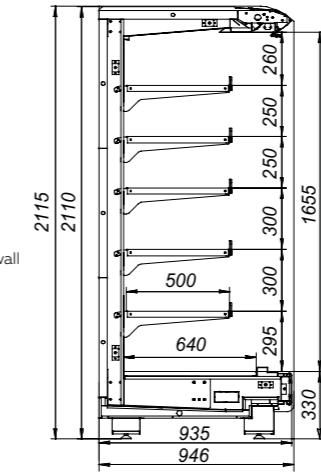
**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

	VHSp 3,75	VHSnp 3,75
cooled volume temperature, °C	+1...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+640	
refrigerated trays and shelves area, m <sup>2</sup>	12,0	
useful refrigerated capacity, m <sup>3</sup>	3,26	
daily electric energy consumption, kWh	4,2	6,2
width without sidewall, mm	3750	
depth without sidewall, mm	935	
height without sidewall, mm	2110	

**Logistic information**

net, kg .....	455
gross, kg.....	630
packing width, mm.....	4000
packing depth, mm.....	1200
packing height, mm .....	800

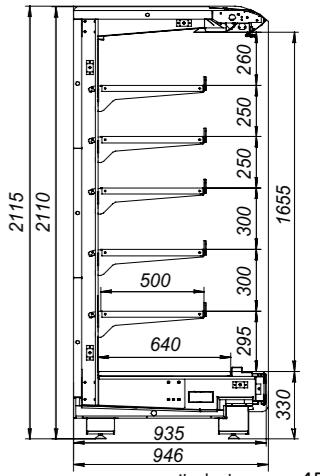**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass



«WARSAW» 210/94 VHSp side end	1,68
cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	5x500+640
refrigerated trays and shelves area, m <sup>2</sup>	5,0
daily electric energy consumption, kWh	2,5
useful refrigerated capacity, m <sup>3</sup>	1,46
width without sidewall, mm	1885
depth without sidewall, mm	946
height without sidewall, mm	2110

## Logistic information


net, kg .....	227
gross, kg.....	375
packing width, mm.....	2150
packing depth, mm.....	1120
packing height, mm .....	2360



RAL  
5002 6029 3020 1003 9016



- Complementary options:
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

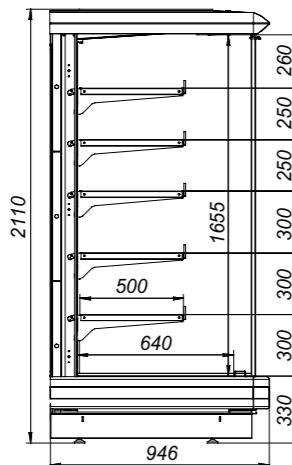

«WARSAW» 210/94 VHSp	1,25 fruit
cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	3x500+640
refrigerated trays and shelves area, m <sup>2</sup>	2,7
daily electric energy consumption, kWh	1,8
useful refrigerated capacity, m <sup>3</sup>	1,09
width without sidewall, mm	1250
depth without sidewall, mm	935
height without sidewall, mm	2110

## Logistic information


net, kg .....	150
gross, kg.....	280
packing width, mm.....	1750
packing depth, mm.....	1200
packing height, mm .....	800



RAL  
5002 6029 3020 1003 9016



- Complementary options:
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

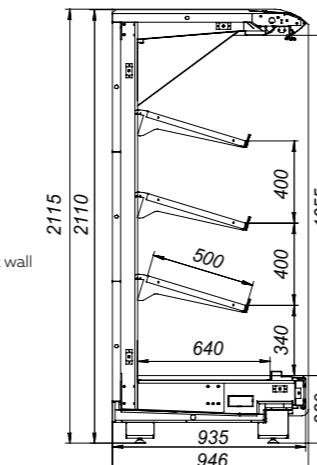

«WARSAW» 210/94 VHSp	1,875 fruit
cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	3x500+640
refrigerated trays and shelves area, m <sup>2</sup>	4,0
daily electric energy consumption, kWh	2,6
useful refrigerated capacity, m <sup>3</sup>	1,63
width without sidewall, mm	1875
depth without sidewall, mm	935
height without sidewall, mm	2110

## Logistic information


net, kg .....	230
gross, kg.....	340
packing width, mm.....	2130
packing depth, mm.....	1200
packing height, mm .....	800



RAL  
5002 6029 3020 1003 9016



- Complementary options:
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

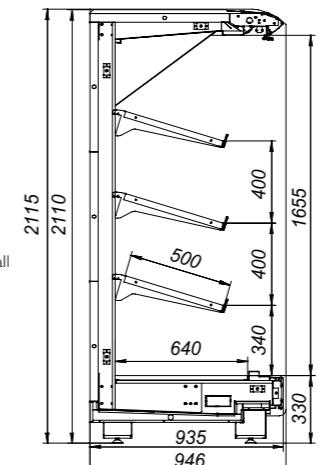

«WARSAW» 210/94 VHSp	2,5 fruit
cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	3x500+640
refrigerated trays and shelves area, m <sup>2</sup>	5,4
daily electric energy consumption, kWh	3,4
useful refrigerated capacity, m <sup>3</sup>	2,17
width without sidewall, mm	2500
depth without sidewall, mm	935
height without sidewall, mm	2110

## Logistic information


net, kg .....	315
gross, kg.....	420
packing width, mm.....	2750
packing depth, mm.....	1200
packing height, mm .....	800



RAL  
5002 6029 3020 1003 9016



- Complementary options:
- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

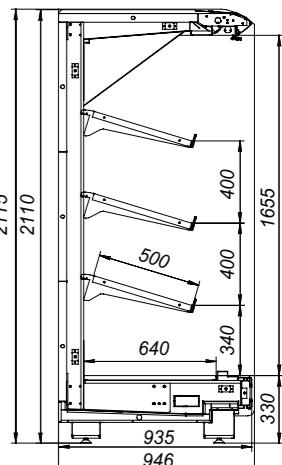




**«WARSAW» 220/105 VHSp**

2,5

cooled volume temperature, °C	+2...+8
at ambient temperature, °C	+12...+25
display depth, mm	5x500+755
refrigerated trays and shelves area, m <sup>2</sup>	8,2
useful refrigerated capacity, m <sup>3</sup>	2,4
daily electric energy consumption, kWh	4,9
width, mm	2500
depth, mm	1050
height, mm	2210

## Logistic information

net, kg	400
gross, kg	540
packing width, mm	2770
packing depth, mm	1200
packing height, mm	2400

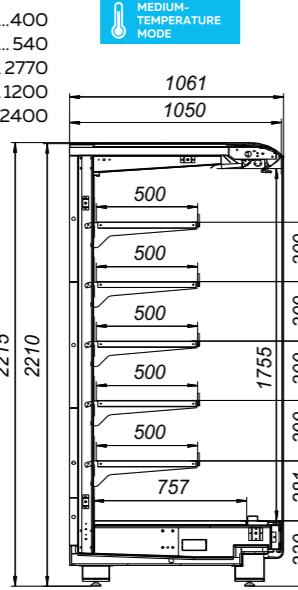

## Complementary options:

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass


**«WARSAW» 220/105 VHSp**

3,75

cooled volume temperature, °C	+2...+8
at ambient temperature, °C	+12...+25
display depth, mm	5x500+755
refrigerated trays and shelves area, m <sup>2</sup>	12,3
useful refrigerated capacity, m <sup>3</sup>	3,5
daily electric energy consumption, kWh	6,2
width, mm	3750
depth, mm	1050
height, mm	2210

## Logistic information

net, kg	580
gross, kg	770
packing width, mm	4020
packing depth, mm	1200
packing height, mm	2400

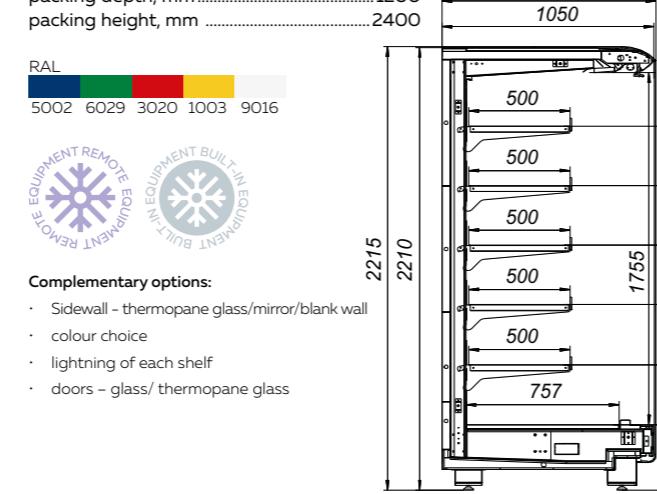

## Complementary options:

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass


**«WARSAW» 160/94 VHSp**

2,5

cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	300, 400, 500, 640
refrigerated trays and shelves area, m <sup>2</sup>	4,6
useful refrigerated capacity, m <sup>3</sup>	1,4
daily electric energy consumption, kWh	2,9
width, mm	2500
depth, mm	935
height, mm	1560

## Logistic information

net, kg	260
gross, kg	420
packing width, mm	2750
packing depth, mm	1200
packing height, mm	800

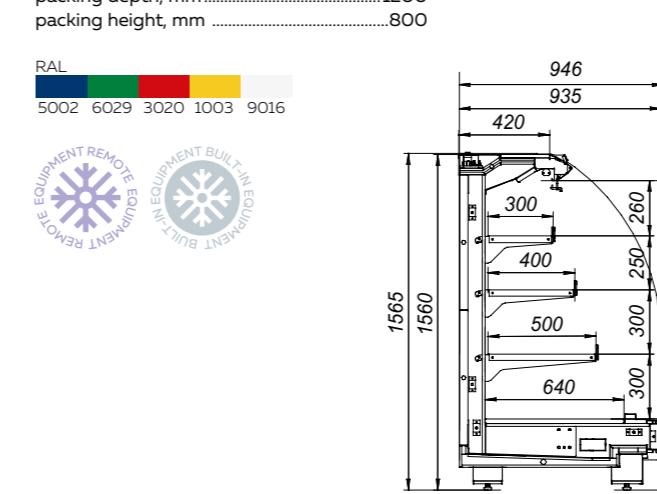
**«WARSAW» 160/94 VHSp**

3,75

cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	300, 400, 500, 640
refrigerated trays and shelves area, m <sup>2</sup>	6,9
useful refrigerated capacity, m <sup>3</sup>	2,1
daily electric energy consumption, kWh	4,2
width, mm	3750
depth, mm	935
height, mm	1560

## Logistic information

net, kg	365
gross, kg	630
packing width, mm	4000
packing depth, mm	1200
packing height, mm	800

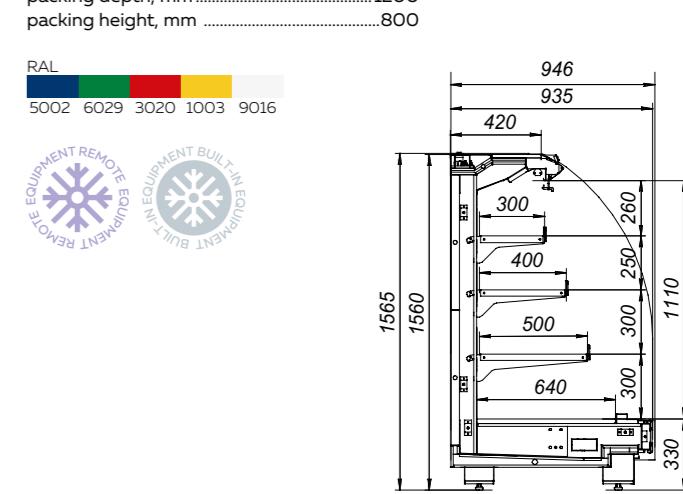

# WALL SHOWCASES «WARSAW»






«WARSAW» 160/94 VHSp

1,25

cooled volume temperature, °C	+1...+7
at ambient temperature, °C	+12...+25
display depth, mm	300, 400, 500, 640
refrigerated trays and shelves area, m <sup>2</sup>	2,3
useful refrigerated capacity, m <sup>3</sup>	0,7
daily electric energy consumption, kWh	1,6
width, mm	1250
depth, mm	935
height, mm	1560

## Logistic information

net, kg .....	130
gross, kg.....	240
packing width, mm.....	1750
packing depth, mm .....	1200
packing height, mm .....	800

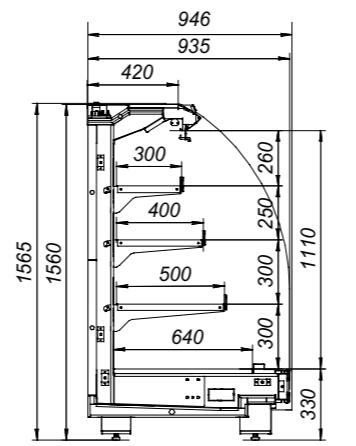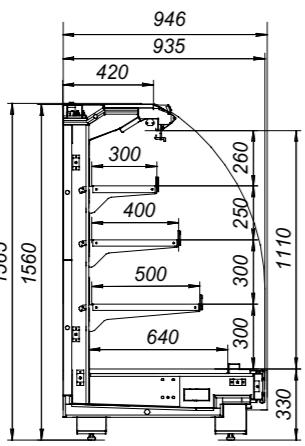


**WARSAW» 160/94 VHSp** side end

Cooled volume temperature, °C	+1...+7
ambient temperature, °C	+12...+25
Display depth, mm	300, 400, 500, 640
Refrigerated trays and shelves area, m <sup>2</sup>	5,0
Useful refrigerated capacity, m <sup>3</sup>	0,9
Daily electric energy consumption, kWh	2,5
Width, mm	1885
Depth, mm	946
Height, mm	2110

logistic information

et, kg .....	175
ross, kg.....	280
acking width, mm.....	2150
acking depth, mm .....	1120
acking height, mm .....	1180

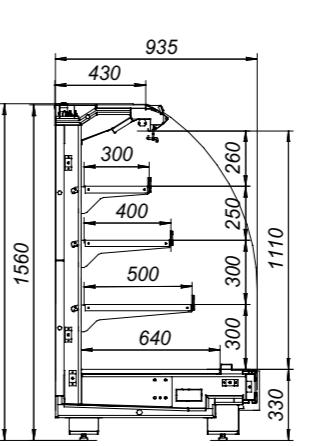




«SOFIA» 195/71 VHSp	VHSp 1,25	VHSnp 1,25
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x400+490	
refrigerated trays and shelves area, m <sup>2</sup>	3,1	
useful refrigerated capacity, m <sup>3</sup>	0,78	
daily electric energy consumption, kWh	1,6	1,9
width, mm	1250	
depth, mm	710	
height, mm	1965	


## Logistic information

net, kg .....	120
gross, kg.....	260
packing width, mm.....	2060
packing depth, mm.....	1200
packing height, mm .....	800



#### Complementary options:


- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

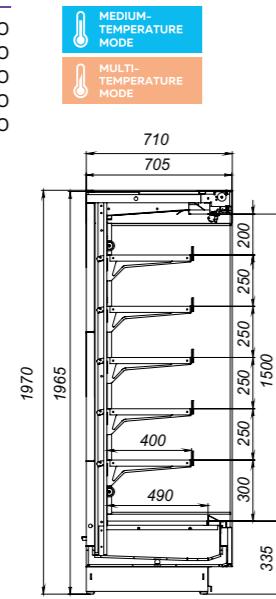

«SOFIA» 195/71 VHSp		VHSp 1,875	VHSnp 1,875
cooled volume temperature, °C		0...+7	-3...+3
at ambient temperature, °C		+12...+25	
display depth, mm		5x400+490	
refrigerated trays and shelves area, m <sup>2</sup>		4,65	
useful refrigerated capacity, m <sup>3</sup>		1,17	
daily electric energy consumption, kWh	1,7	2,0	
width, mm		1875	
depth, mm		710	
height, mm		1965	


## Logistic information

net, kg .....	185
gross, kg.....	330
packing width, mm.....	2260
packing depth, mm .....	1200
packing height, mm .....	800



## Complementary options


- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

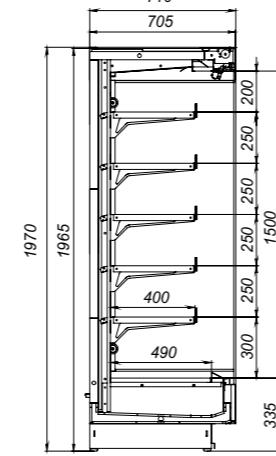

«SOFIA» 195/71 VHSp	VHSp 2,5	VHSnp 2
cooled volume temperature, °C	0...+7	-3...+
at ambient temperature, °C	+12...+25	
display depth, mm	5x400+490	
refrigerated trays and shelves area, m <sup>2</sup>	6,2	
useful refrigerated capacity, m <sup>3</sup>	1,56	
daily electric energy consumption, kWh	2,5	2,9
width, mm	2500	
depth, mm	710	
height, mm	1965	


## Logistic information

net, kg .....	255
gross, kg .....	420
packing width, mm .....	2069
packing depth, mm .....	1200
packing height, mm .....	800



### Complementary options:


- Sidewall - thermopane glass/mirror/blank wa
  - colour choice
  - lightning of each shelf
  - doors – glass/ thermopane glass

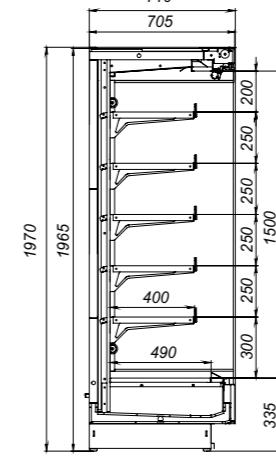

«SOFIA» 195/71 VHSp	VHSp 3,75	VHSnp 3,75
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x400+490	
refrigerated trays and shelves area, m <sup>2</sup>	9,3	
useful refrigerated capacity, m <sup>3</sup>	2,34	
daily electric energy consumption, kWh	3,4	3,9
width, mm	3750	
depth, mm	710	
height, mm	1965	


## Logistic information

net, kg .....	365
gross, kg.....	550
packing width, mm.....	3890
packing depth, mm .....	1200
packing height, mm .....	800



#### Complementary options:

- Sidewall - thermopane glass/mirror/blank wall
  - colour choice
  - lightning of each shelf
  - doors - glass/ thermopane glass

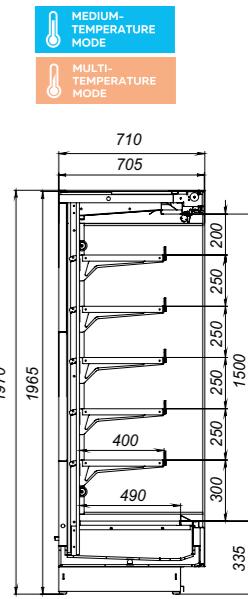



«SOFIA» 210/92 VHSp	VHSp 1,25	VHSnp 1,25
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+680	
refrigerated trays and shelves area, m <sup>2</sup>	4,0	
useful refrigerated capacity, m <sup>3</sup>	1,09	
daily electric energy consumption, kWh	1,4	1,7
width, mm	1250	
depth, mm	930	
height, mm	2120	

**Logistic information**


net, kg ..... 170  
 gross, kg ..... 280  
 packing width, mm ..... 2060  
 packing depth, mm ..... 1200  
 packing height, mm ..... 800



RAL  
 5002 6029 3020 1003 9016

**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

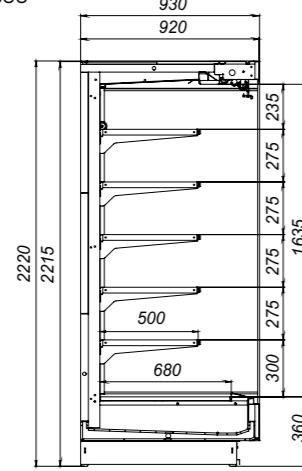

«SOFIA» 210/92 VHSp	VHSp 1,875	VHSnp 1,875
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+680	
refrigerated trays and shelves area, m <sup>2</sup>	6,0	
useful refrigerated capacity, m <sup>3</sup>	1,63	
daily electric energy consumption, kWh	2,4	2,7
width, mm	1875	
depth, mm	930	
height, mm	2120	

**Logistic information**


net, kg ..... 280  
 gross, kg ..... 350  
 packing width, mm ..... 2260  
 packing depth, mm ..... 1200  
 packing height, mm ..... 800



RAL  
 5002 6029 3020 1003 9016

**Complementary options:**


- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

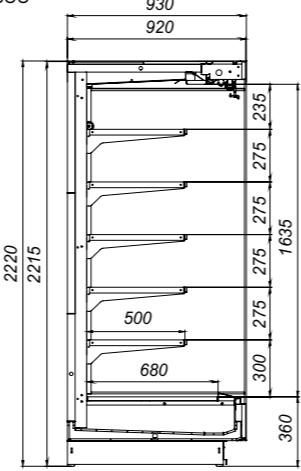

«SOFIA» 210/92 VHSp	VHSp 2,5	VHSnp 2,5
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+680	
refrigerated trays and shelves area, m <sup>2</sup>	8,0	
useful refrigerated capacity, m <sup>3</sup>	2,18	
daily electric energy consumption, kWh	2,5	2,9
width, mm	2500	
depth, mm	930	
height, mm	2120	

**Logistic information**


net, kg ..... 360  
 gross, kg ..... 440  
 packing width, mm ..... 2069  
 packing depth, mm ..... 1200  
 packing height, mm ..... 800



RAL  
 5002 6029 3020 1003 9016

**Complementary options:**


- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

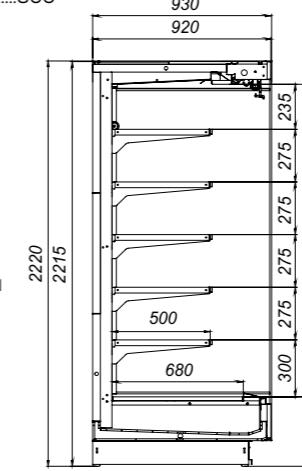

«SOFIA» 210/92 VHSp	VHSp 3,75	VHSnp 3,75
cooled volume temperature, °C	0...+7	-3...+3
at ambient temperature, °C	+12...+25	
display depth, mm	5x500+680	
refrigerated trays and shelves area, m <sup>2</sup>	12,0	
useful refrigerated capacity, m <sup>3</sup>	3,27	
daily electric energy consumption, kWh	3,5	4,0
width, mm	3750	
depth, mm	930	
height, mm	2120	

**Logistic information**


net, kg ..... 410  
 gross, kg ..... 630  
 packing width, mm ..... 3890  
 packing depth, mm ..... 1200  
 packing height, mm ..... 800



RAL  
 5002 6029 3020 1003 9016

**Complementary options:**

- Sidewall - thermopane glass/mirror/blank wall
- colour choice
- lightning of each shelf
- doors - glass/ thermopane glass

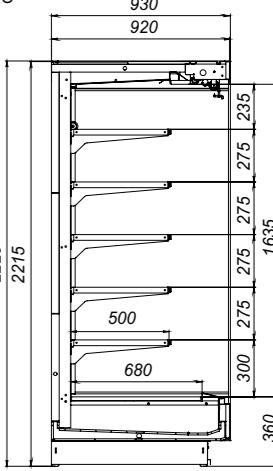

A photograph of a young couple in a supermarket. The man, on the left, is wearing a blue and white checkered shirt and has a beard; he is smiling and pointing towards something off-camera. The woman, on the right, is wearing a red, white, and blue checkered shirt over a dark top; she is laughing and looking in the same direction. They are standing next to a shopping cart with an orange handle. In the background, there are shelves stocked with various products.

**WALL SHOWCASES**  
«BARCELONA»

**«BARCELONA» VHNp****1,57**


cooled volume temperature, °C	-20
at ambient temperature, °C	+12...+25
display depth, mm	4x575+605
refrigerated trays and shelves area, m <sup>2</sup>	5,3
useful refrigerated capacity, m <sup>3</sup>	1,36
daily electric energy consumption, kWh	19,4
width without sidewall, mm	1562
depth without sidewall, mm	935
height, mm	2160

## Logistic information

net, kg	325
gross, kg	450
packing width, mm	1880
packing depth, mm	1150
packing height, mm	2345

RAL

5002 6029 3020 1003 9016

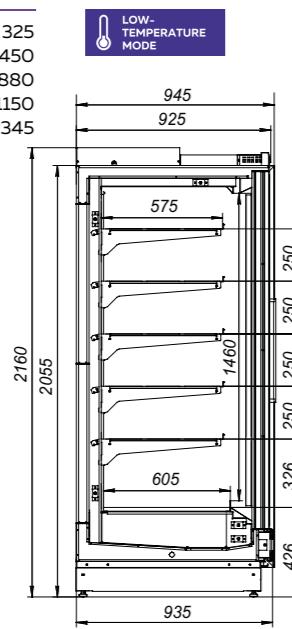**«BARCELONA» VHNp****2,35**


cooled volume temperature, °C	-20
at ambient temperature, °C	+12...+25
display depth, mm	4x575+605
refrigerated trays and shelves area, m <sup>2</sup>	7,9
useful refrigerated capacity, m <sup>3</sup>	2,52
daily electric energy consumption, kWh	29,2
width without sidewall, mm	2343
depth without sidewall, mm	935
height, mm	2160

## Logistic information

net, kg	460
gross, kg	630
packing width, mm	2660
packing depth, mm	1150
packing height, mm	2345

RAL

5002 6029 3020 1003 9016

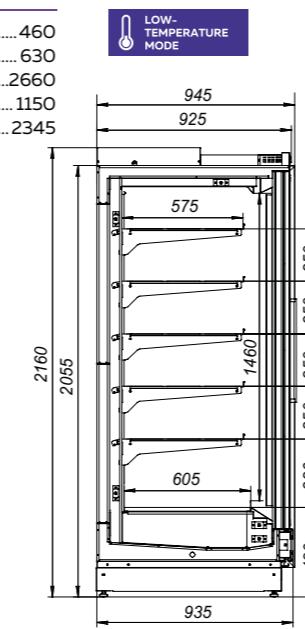**«BARCELONA» VHNp****3,13**


cooled volume temperature, °C	-20
at ambient temperature, °C	+12...+25
display depth, mm	4x575+605
refrigerated trays and shelves area, m <sup>2</sup>	10,5
useful refrigerated capacity, m <sup>3</sup>	2,71 daily
electric energy consumption, kWh	38,3
width without sidewall, mm	3124
depth without sidewall, mm	935
height, mm	2160

## Logistic information

net, kg	585
gross, kg	780
packing width, mm	3440
packing depth, mm	1150
packing height, mm	2345

RAL

5002 6029 3020 1003 9016

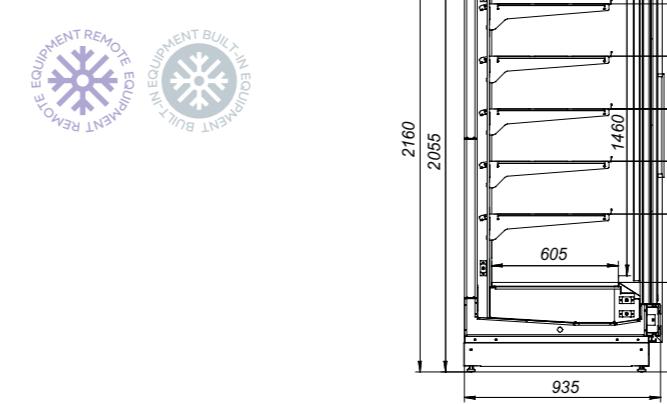**«BARCELONA» VHNp****3,9**


cooled volume temperature, °C	-20
at ambient temperature, °C	+12...+25
display depth, mm	4x575+605
refrigerated trays and shelves area, m <sup>2</sup>	13,2
useful refrigerated capacity, m <sup>3</sup>	3,38 daily
electric energy consumption, kWh	47,2
width without sidewall, mm	3905
depth without sidewall, mm	935
height, mm	2160

## Logistic information

net, kg	710
gross, kg	930
packing width, mm	4220
packing depth, mm	1150
packing height, mm	2345

RAL

5002 6029 3020 1003 9016

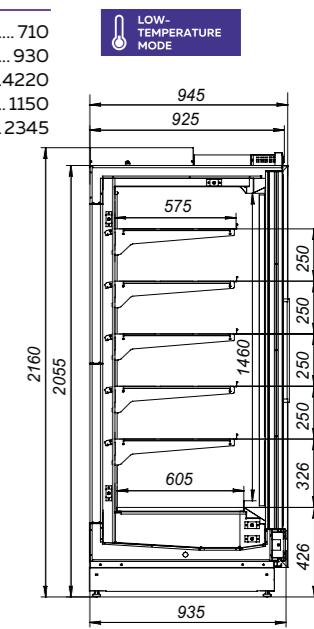



# GONDOLAS



## GONDOLAS «CALYPSO»

A low-temperature refrigerated showcase is designed for display, short-term storage and sale of food products, including semi-finished products, previously frozen to the temperature of the cooled volume, at the trade and public catering facilities. The showcase allows storing products in the temperature range of useful volume not over -18°C.





**«CALYPSO» VHNo 2,5**

cooled volume temperature, °C	maximum -18
at ambient temperature, °C	+12...+25
display depth, mm	394
refrigerated trays and shelves area, m <sup>2</sup>	4,2
useful refrigerated capacity, m <sup>3</sup>	1,66
daily electric energy consumption, kWh	23,7
width, mm	2500
depth, mm	1980
height, mm	1110

## Logistic information


net, kg	520	
gross, kg	700	
packing width, mm	2900	
packing depth, mm	2200	
packing height, mm	1350	

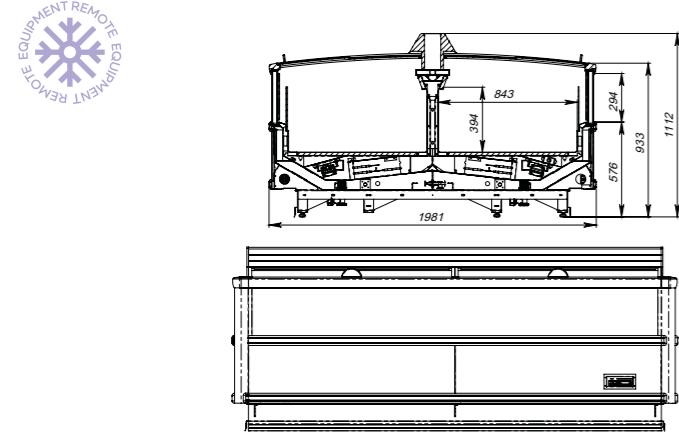
**«CALYPSO» VHNo 3,75**

cooled volume temperature, °C	maximum -18
at ambient temperature, °C	+12...+25
display depth, mm	394
refrigerated trays and shelves area, m <sup>2</sup>	6,3
useful refrigerated capacity, m <sup>3</sup>	2,49
daily electric energy consumption, kWh	34,9
width, mm	3750
depth, mm	1980
height, mm	1110

## Logistic information


net, kg	700	
gross, kg	950	
packing width, mm	4150	
packing depth, mm	2200	
packing height, mm	1350	

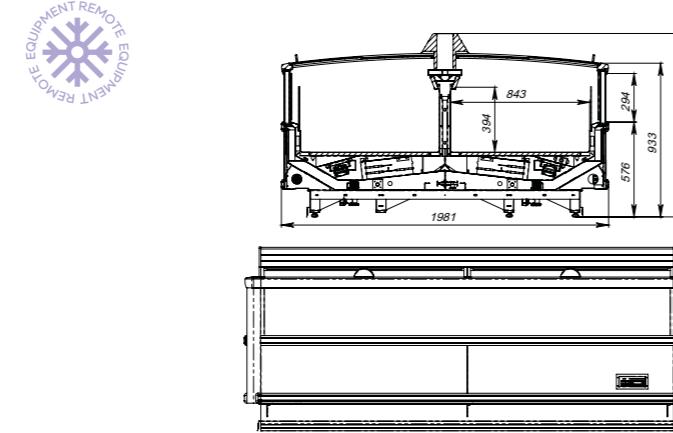
**«CALYPSO» VHNo side end**

cooled volume temperature, °C	maximum -18
at ambient temperature, °C	+12...+25
display depth, mm	394
refrigerated trays and shelves area, m <sup>2</sup>	1,5
useful refrigerated capacity, m <sup>3</sup>	0,59
daily electric energy consumption, kWh	12,0
width, mm	1980
depth, mm	1060
height, mm	1110

## Logistic information


net, kg	270	
gross, kg	370	
packing width, mm	2200	
packing depth, mm	1300	
packing height, mm	1350	

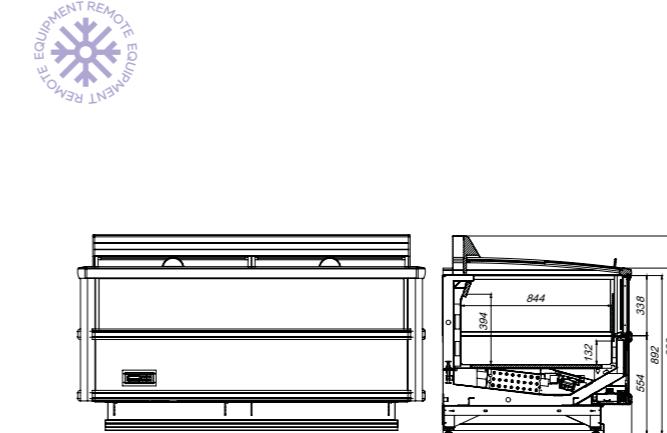
**«CALYPSO» VHNo side end elongate**

cooled volume temperature, °C	maximum -18
at ambient temperature, °C	+12...+25
display depth, mm	394
refrigerated trays and shelves area, m <sup>2</sup>	1,5
useful refrigerated capacity, m <sup>3</sup>	0,59
daily electric energy consumption, kWh	12,0
width, mm	1980
depth, mm	1060
height, mm	1110

## Logistic information

net, kg	270	
gross, kg	370	
packing width, mm	2200	
packing depth, mm	1300	
packing height, mm	1350	



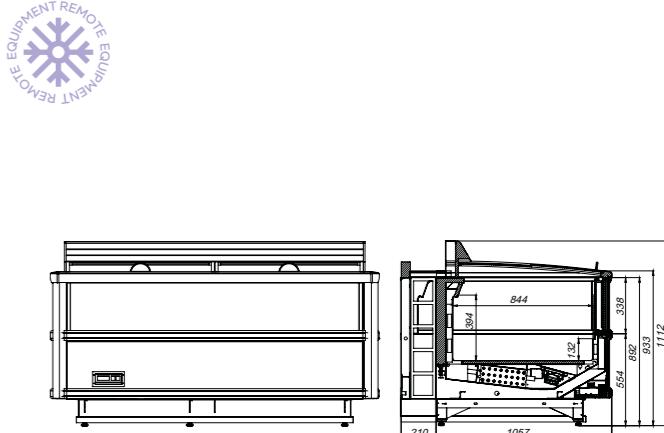


## GONDOLAS «RITSA»



The Ritsa low-temperature refrigerated showcases produced by Marikholodmash are intended for display, short term storage and sale of previously frozen food products at the trade facilities with remote refrigeration. It is difficult to imagine a modern supermarket without one or several lines of showcases. This type of refrigeration equipment is extremely popular and convenient for buyers and sellers. The showcase construction allows forming a continuous line of equipment of any length in universal design with the possibility of connection without side panels; a set of fasteners is provided for this purpose.


As an option, we can offer a superstructure with shelves, fluorescent lighting and price holders.

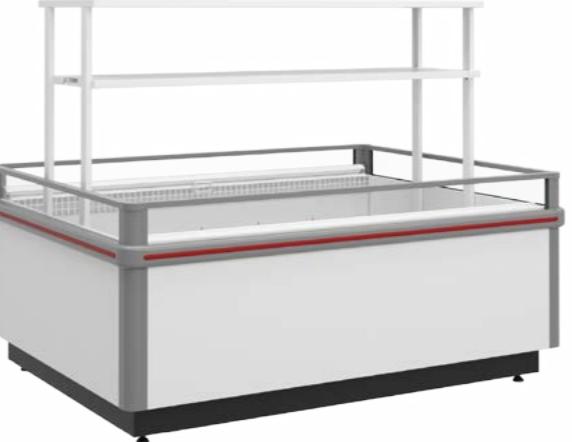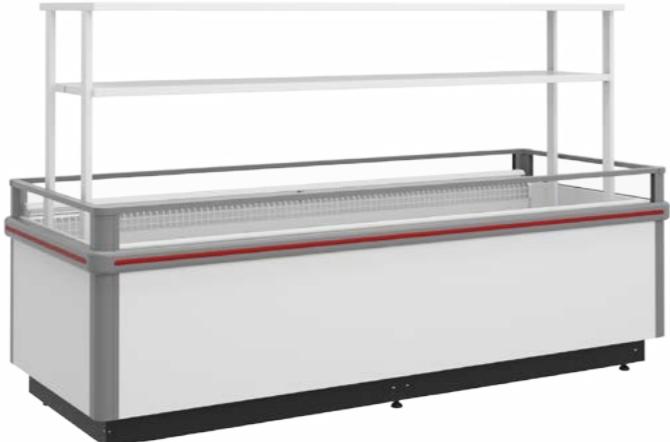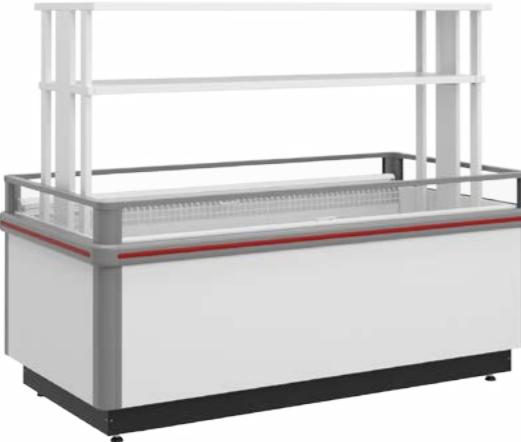
**«RITSA» VHNo 1,875/1,0**

cooled volume temperature, °C	-18
at ambient temperature, °C	+12...+25
display depth, mm	300
refrigerated trays and shelves area, m <sup>2</sup>	1,5
useful refrigerated capacity, m <sup>3</sup>	0,42
daily electric energy consumption, kWh	5,7
width, mm	1875
depth, mm	1075
height, mm	880

## Logistic information


net, kg .....  
gross, kg..... 200+100  
packing width, mm..... 2240  
packing depth, mm..... 1200  
packing height, mm ..... 1100

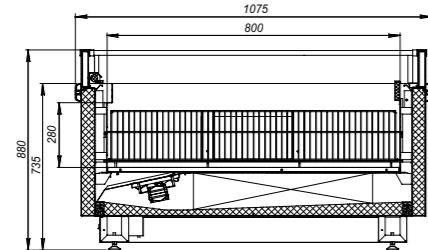
**«RITSA» VHNo 2,5/1,0**

cooled volume temperature, °C	-18
at ambient temperature, °C	+12...+25
display depth, mm	300
refrigerated trays and shelves area, m <sup>2</sup>	2,0
useful refrigerated capacity, m <sup>3</sup>	0,56
daily electric energy consumption, kWh	7,6
width, mm	2500
depth, mm	1075
height, mm	880

## Logistic information


net, kg .....  
gross, kg..... 300+130  
packing width, mm..... 3000  
packing depth, mm..... 1200  
packing height, mm ..... 1100

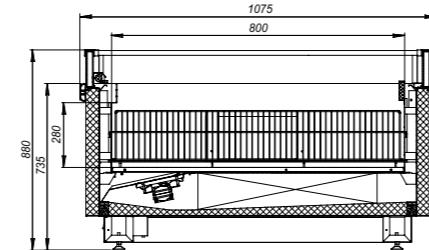
**«RITSA» VHNo 1,875/1,5**

cooled volume temperature, °C	-18
at ambient temperature, °C	+12...+25
display depth, mm	300
refrigerated trays and shelves area, m <sup>2</sup>	2,4
useful refrigerated capacity, m <sup>3</sup>	0,71
daily electric energy consumption, kWh	5,9
width, mm	1875
depth, mm	1575
height, mm	880

## Logistic information


net, kg .....  
gross, kg..... 300+100  
packing width, mm..... 2240  
packing depth, mm..... 1700  
packing height, mm ..... 1100

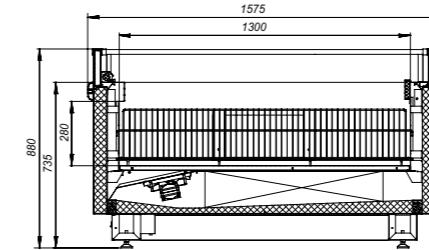
**«RITSA» VHNo 2,5/1,5**

cooled volume temperature, °C	-18
at ambient temperature, °C	+12...+25
display depth, mm	300
refrigerated trays and shelves area, m <sup>2</sup>	3,3
useful refrigerated capacity, m <sup>3</sup>	0,97
daily electric energy consumption, kWh	7,8
width, mm	2500
depth, mm	1575
height, mm	880

## Logistic information

net, kg .....  
gross, kg..... 400+130  
packing width, mm..... 3000  
packing depth, mm..... 1700  
packing height, mm ..... 1100

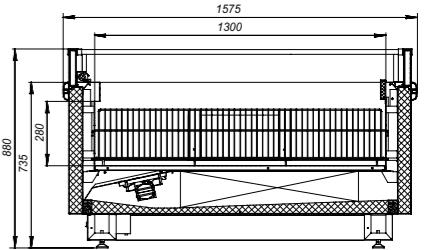



COLD  
ACKNOWLEDGED  
BY TIME

**MXM**  
m a r i k h o l o d m a s h

«Contact», JSC  
133 Karla Marks Street Yoshkar-Ola,  
the Republic of Mari El, 424026  
phone: +7 (8362) 45-08-95, 45-06-70, 45-27-90  
zavod@mariholod.com

mariholod.com

mariholodmash.official