



Professional kitchen equipment

Catalogue of the
professional commercial
refrigeration equipment

Model range 2019

MXM
m a r i k h o l o d m a s h
www.mariholod.com

ABOUT US	4
700 SERIES ELECTRIC RANGE	
700 Series electric desktop range.....	8
700 Series electric range with stands	11
700 Series electric range with ovens	13
Neutral cabinets	15
900 SERIES ELECTRIC RANGE	
900 Series electric range with stands.....	18
900 Series electric range with ovens.....	21
Electric baking deck ovens	24
Boiling kettles	26
BAKING AND PROOFING CABINETS	
Electric baking deck ovens	30
Electric proofing cabinets.....	32
FOOD SELF-SERVICE MODULAR LINE	
Cutlery and tray counters.....	38
Closed refrigerated display counters	39
First courses bain-maries.....	40
Seconds courses steam bain-maries.....	41
Hot drink counters.....	42
Hot drink counters with shelves	43
Cash counter	44



ABOUT US

The history of the Marikholodmash trademark dates back to the founding of the commercial machine-building plant in 1941 (evacuated from Kiev) that specialized in the production of shells, shop scales and other shop equipment.

Since 1960, the plant has specialized in the production of commercial refrigeration equipment. It was this plant that produced the first homemade refrigerating cabinets and refrigerating chambers. Over the years, several kinds of commercial refrigeration equipment have been developed and introduced into production.

The Tair refrigerated showcase has been produced since 1970. The showcase underwent many modernizations and design changes; it is developed in line with the latest technologies in commercial refrigeration equipment so that it is in constant demand.

Our company produced equipment for such facilities as: the Kremlin Palace of Congresses, the Ostankino Tower restaurant, the first Russian self-service shops.

Currently, the Marikholodmash trademark is produced by Contact JSC, which has preserved all the best traditions, improved quality and expanded the product range.

Currently, the Contact Plant offers a wide range of modern commercial refrigeration equipment. The product lines of refrigerated showcases are placed on the market - Ilet, Tair, Nova, Kupets and Veneto.

In 2012, the plant launched a new series of medium-temperature refrigerating cabinets under the name of Capri. For their production, a modern metalworking line manufactured by Salvagnini (Italy) and a line for the production of cabinets manufactured by Meccanica NAI (Italy) were mounted and launched.

Besides, the plant manufactures other equipment for trade such as: refrigerated counters, checkout counters, racks, refrigerated showcase and multidecks.

Thanks to the use of modern technologies, the products manufactured by the Contact Plant have:

- high quality;
- reliability and operational convenience;
- modern design;
- competitive price

Besides, the plant manufactures other equipment for trade such as: refrigerated counters, checkout counters, racks, refrigerated showcase and multidecks.

Those who buy our equipment can be sure that they purchase products that meet the most modern requirements and have an excellent price-quality ratio.

The equipment manufactured by Contact, in contrast to most other commercial refrigeration equipment manufacturers, operates at ambient temperature over 35 C that undoubtedly emphasizes its reliability.

The use of modern powder paints and their application on an automatic programmed painting line provides a beautiful appearance of commercial refrigeration equipment and surface protection against corrosion.

The plant produces electroplating parts on the Italian automated programmed line.

The complete safety of commercial refrigeration equipment during loading, transportation and storage is guaranteed by specially designed packaging.

**700 SERIES
ELECTRIC RANGES**





Electric range PE 27N

number of hot plates, pcs	2
nominal rated power consumption, kW	5,6
hot plate size, mm	300x300
air duct	no
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,18
hot plate power consumption, kW	2,8
length, mm	400
width, mm	700
height, mm	370

Logistic information

net, kg	34
gross, kg	57
packing length, mm	600
packing width, mm	900
packing height, mm	576

Electric range PE 27N-02

number of hot plates, pcs	2
nominal rated power consumption, kW	5,6
hot plate size, mm	300x300
air duct	yes
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,18
hot plate power consumption, kW	2,8
length, mm	400
width (air duct), mm	700 (760)
height (air duct), mm	370 (450)

Logistic information

net, kg	35
gross, kg	58,5
packing length, mm	600
packing width, mm	900
packing height, mm	576

Electric range PE 47N

number of hot plates, pcs	4
nominal rated power consumption, kW	11,2
hot plate size, mm	300x300
air duct	no
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,36
hot plate power consumption, kW	2,8
length, mm	800
width, mm	700
height, mm	370

Logistic information





net, kg	60
gross, kg	93
packing length, mm	950
packing width, mm	900
packing height, mm	600

Electric range PE 47N-02

number of hot plates, pcs	4
nominal rated power consumption, kW	11,2
hot plate size, mm	300x300
air duct	yes
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,36
hot plate power consumption, kW	2,8
length, mm	800
width (air duct), mm	700 (760)
height (air duct), mm	370 (450)

Logistic information

net, kg	62
gross, kg	95
packing length, mm	950
packing width, mm	900
packing height, mm	600

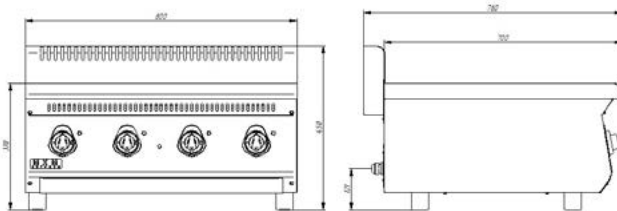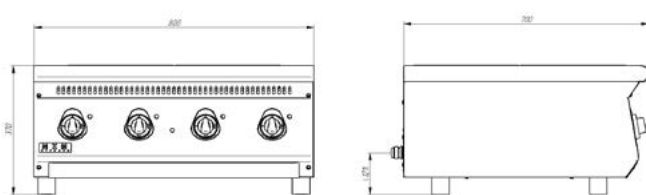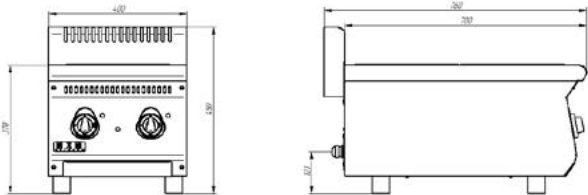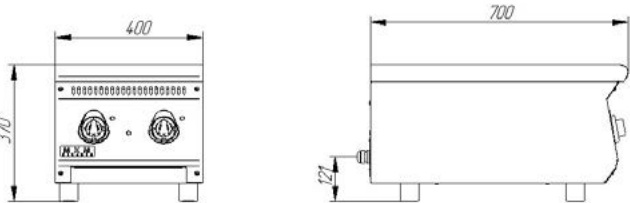



Electric range PE 67N

number of hot plates, pcs	6
nominal rated power consumption, kW	16,8
hot plate size, mm	300x300
air duct	no
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,54
hot plate power consumption, kW	2,8
length, mm	1110
width, mm	700
height, mm	370

Logistic information


net, kg	109
gross, kg	146
packing length, mm	1315
packing width, mm	900
packing height, mm	576

Electric range PE 67N-02

number of hot plates, pcs	6
nominal rated power consumption, kW	16,8
hot plate size, mm	300x300
air duct	yes
side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,54
hot plate power consumption, kW	2,8
length, mm	1110
width (air duct), mm	700 (760)
height (air duct), mm	370 (450)

Logistic information

net, kg	112
gross, kg	149
packing length, mm	1315
packing width, mm	900
packing height, mm	576

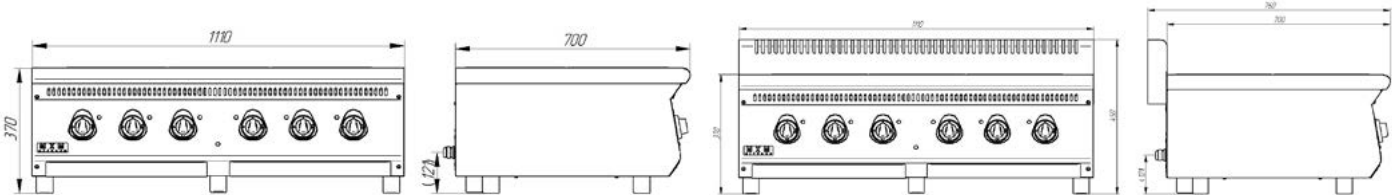

Electric range PE 47P

number of hot plates, pcs	4
nominal rated power consumption, kW	11,2
hot plate size, mm	300x300
air duct	no
stand and side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,36
hot plate power consumption, kW	2,8
length, mm	800
width, mm	700
height, mm	860

Logistic information


net, kg	80
gross, kg	121
packing length, mm	950
packing width, mm	900
packing height, mm	1150

Electric range PE 47P-02

number of hot plates, pcs	4
nominal rated power consumption, kW	11,2
hot plate size, mm	300x300
air duct	yes
stand and side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,36
hot plate power consumption, kW	2,8
length, mm	800
width (air duct), mm	700 (760)
height (air duct), mm	860 (940)

Logistic information

net, kg	82
gross, kg	123
packing length, mm	950
packing width, mm	900
packing height, mm	1150

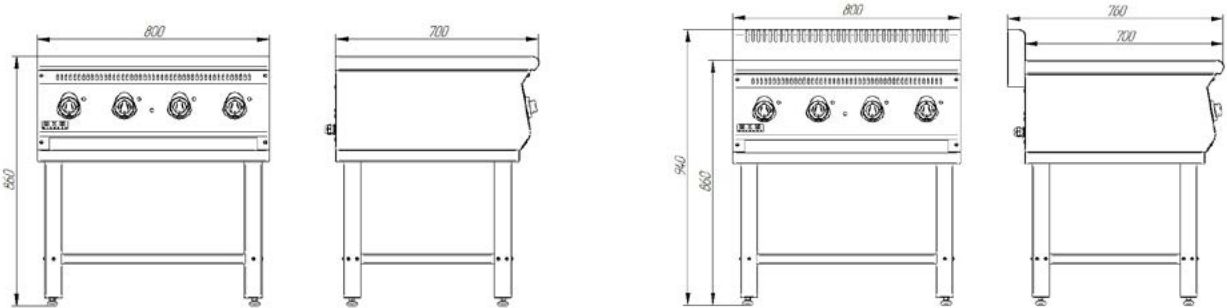




Electric range PE 67P

number of hot plates, pcs	6
nominal rated power consumption, kW	16,8
hot plate size, mm	300x300
air duct	no
stand and side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,54
hot plate power consumption, kW	2,8
length, mm	1110
width, mm	700
height, mm	860

Logistic information

net, kg	106
gross, kg	157
packing length, mm	1315
packing width, mm	900
packing height, mm	1150

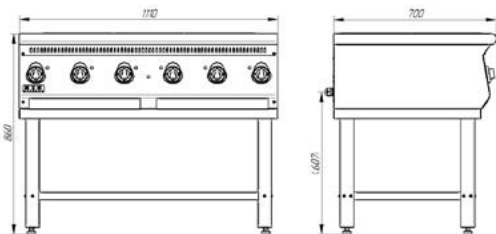


Electric range PE 67P-02

number of hot plates, pcs	6
nominal rated power consumption, kW	16,8
hot plate size, mm	300x300
air duct	yes
stand and side panel material	stainless steel
height-adjustable legs	yes
hot-plate working area, not more than m²	0,54
hot plate power consumption, kW	2,8
length, mm	1110
width (air duct), mm	700 (760)
height (air duct), mm	860 (940)

Logistic information

net, kg	109
gross, kg	160
packing length, mm	1315
packing width, mm	900
packing height, mm	1150

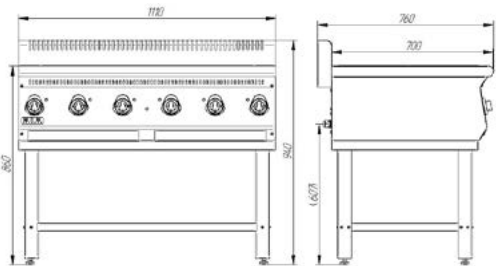

Electric range PE 47J

number of hot plates, pcs	4
hot plate size, mm	300x300
nominal rated power consumption, kW	16,0
hot plate power consumption, kW	2,8
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	no
oven and side panel material	carbon steel
oven bedplate thickness, mm	3
baking tray dimensions, mm	470x530x30
number of trays in the set, pcs	3
length, mm	800
width, mm	700
height, mm	860

Logistic information

net, kg	130
gross, kg	171
packing length, mm	950
packing width, mm	1000
packing height, mm	1150



Electric range PE 47J-02

number of hot plates, pcs	4
hot plate size, mm	300x300
nominal rated power consumption, kW	16,0
hot plate power consumption, kW	2,8
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	yes
oven and side panel material	stainless steel
oven bedplate thickness, mm	3
baking tray dimensions, mm	470x530x30
number of trays in the set, pcs	3
length, mm	800
width (air duct), mm	700 (760)
height (air duct), mm	860 (940)

Logistic information

net, kg	132
gross, kg	173
packing length, mm	950
packing width, mm	1000
packing height, mm	1150



Electric range PE 67J

number of hot plates, pcs	6
hot plate size, mm	300x300
nominal rated power consumption, kW	21,6
hot plate power consumption, kW	2,8
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	no
inventory box	yes
oven and side panel material	carbon steel
oven bedplate thickness, mm	3
baking tray dimensions, mm	470x530x30
number of trays in the set, pcs	3
length, mm	1110
width, mm	700
height, mm	860

Logistic information

net, kg	170
gross, kg	221
packing length, mm	1315
packing width, mm	1000
packing height, mm	1150

Electric range PE 67J-02

number of hot plates, pcs	6
hot plate size, mm	300x300
nominal rated power consumption, kW	21,6
hot plate power consumption, kW	2,8
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	yes
inventory box	yes
oven and side panel material	stainless steel
oven bedplate thickness, mm	3
baking tray dimensions, mm	470x530x30
number of trays in the set, pcs	3
length, mm	1110
width (air duct), mm	700 (760)
height (air duct), mm	860 (940)

Logistic information

net, kg	170
gross, kg	221
packing length, mm	1350
packing width, mm	1000
packing height, mm	1150



Neutral cabinet


	ShN27	ShN47
number of GN containers 1/1	1	2
permissible load, kg, not more than	75	142
height-adjustable legs	yes	
length, mm	400	800
width, mm	635	
height, mm	540	

Logistic information ShN27

net, kg	15
gross, kg	16
packing length, mm	405
packing width, mm	640
packing height, mm	545

Logistic information ShN47

net, kg	22,5
gross, kg	24
packing length, mm	805
packing width, mm	640
packing height, mm	545

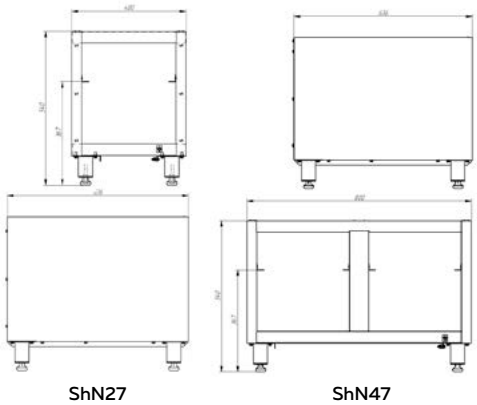

ShN27


ShN47

Neutral cabinet

	ShN67
number of GN containers 1/1	2
permissible load, kg, not more than	232
height-adjustable legs	yes
length, mm	1110
width, mm	635
height, mm	540

Logistic information ShN67

net, kg	30
gross, kg	33
packing length, mm	1160
packing width, mm	640
packing height, mm	545

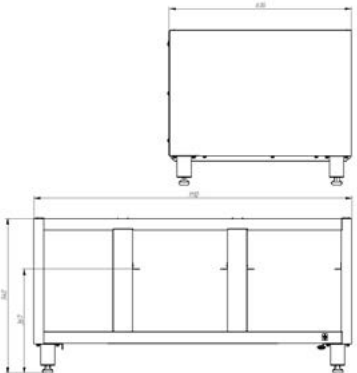



**900 SERIES
ELECTRIC RANGES**




Electric range PE 29P

number of hot plates, pcs	2
hot plate size, mm	295x417
nominal rated power consumption, kW	6,0
rated voltage, V	230
hot plate power consumption, kW	3
air duct	no**
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	550 (760)*
width (air duct), mm	850 (900)**
height (air duct), mm	860 (940)**

Logistic information

net, kg	80
gross, kg	120
packing length, mm	700
packing width, mm	1120
packing height, mm	1140

* side countertops are optional
** air duct is optional

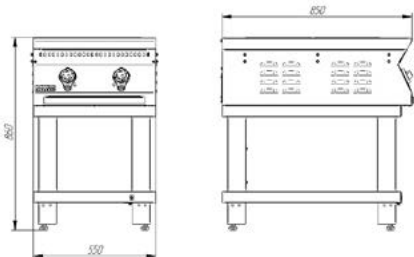


Electric range PE 29P-02

number of hot plates, pcs	2
hot plate size, mm	295x417
nominal rated power consumption, kW	6,0
rated voltage, V	230
hot plate power consumption, kW	3
air duct	yes
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	550 (760)*
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	81
gross, kg	121
packing length, mm	700
packing width, mm	1120
packing height, mm	1140

* side countertops are optional

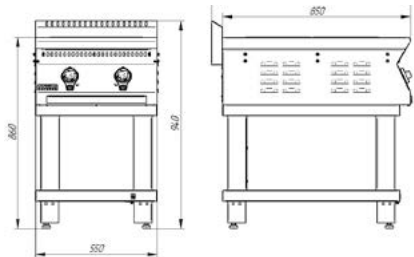


Electric range PE 49P

number of hot plates, pcs	4
hot plate size, mm	295x417
nominal rated power consumption, kW	12,0
rated voltage, V	400
hot plate power consumption, kW	3
air duct	no**
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	840 (1050)
width (air duct), mm	850 (900)**
height (air duct), mm	860 (940)**

Logistic information

net, kg	120
gross, kg	172
packing length, mm	990
packing width, mm	1120
packing height, mm	1140

** air duct is optional

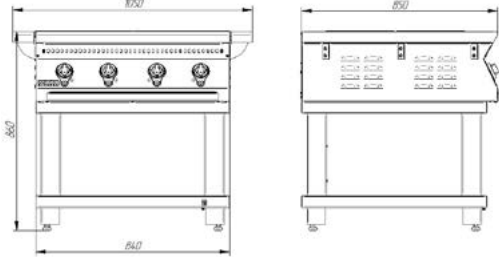


Electric range PE 49P-02

number of hot plates, pcs	4
hot plate size, mm	295x417
nominal rated power consumption, kW	12,0
rated voltage, V	400
hot plate power consumption, kW	3
air duct	yes
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	840 (1050)
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	122
gross, kg	174
packing length, mm	990
packing width, mm	1120
packing height, mm	1140

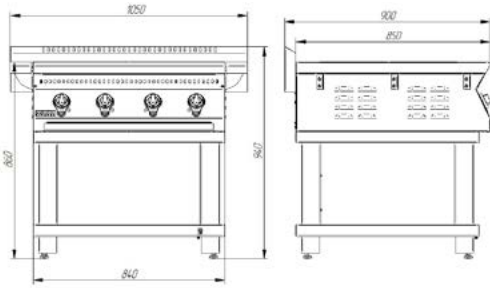



Electric range PE 69P

number of hot plates, pcs	6
hot plate size, mm	295x417
nominal rated power consumption, kW	18,0
rated voltage, V	400
hot plate power consumption, kW	3
air duct	no**
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	1265 (1475)
width (air duct), mm	850 (900)**
height (air duct), mm	860 (940)**

Logistic information

net, kg	165
gross, kg	222
packing length, mm	1415
packing width, mm	1115
packing height, mm	1140

** air duct is optional

Electric range PE 69P-02

number of hot plates, pcs	6
hot plate size, mm	295x417
nominal rated power consumption, kW	18,0
rated voltage, V	400
hot plate power consumption, kW	3
air duct	yes
stand and side panel material	stainless steel
height-adjustable legs	yes
length (with side countertops), mm	1265 (1475)
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	168
gross, kg	225
packing length, mm	1415
packing width, mm	1115
packing height, mm	1140




Electric range PE 29J

	29J	29J-01
number of hot plates, pcs	2	
hot plate size, mm	295x417	
nominal rated power consumption, kW	9,2	
hot plate power consumption, kW	3	
electric oven power consumption, kW	4,8	
temperature control range, °C	20-270	
overheating limiter	yes	
air duct	no**	
inventory box	no	
oven material	carbon steel	stainless steel
side panel material	carbon steel	
oven bedplate thickness, mm	3	
oven size, mm	538x535x290	
baking tray dimensions, mm	470x530	
number of trays in the set, pcs	3	
length (with side countertops), mm	550 (760)*	
width (air duct), mm	850 (900)**	
height (air duct), mm	860 (940)**	

Logistic information

net, kg	110
gross, kg	149
packing length, mm	700
packing width, mm	1120
packing height, mm	1140

* side countertops are optional
** air duct is optional




Electric range PE 29J

	29J-02
number of hot plates, pcs	2
hot plate size, mm	295x417
nominal rated power consumption, kW	9,2
hot plate power consumption, kW	3
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	yes
inventory box	no
oven material	stainless steel
side panel material	stainless steel
oven bedplate thickness, mm	3
oven size, mm	538x535x290
baking tray dimensions, mm	470x530
number of trays in the set, pcs	3
length (with side countertops), mm	550 (760)*
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	111
gross, kg	150
packing length, mm	700
packing width, mm	1120
packing height, mm	1140





Electric range PE 49J

49J


49J-01

number of hot plates, pcs	4	
hot plate size, mm	295x417	
nominal rated power consumption, kW	16,8	
hot plate power consumption, kW	3	
electric oven power consumption, kW	4,8	
temperature control range, °C	20-270	
overheating limiter	yes	
air duct	no**	
inventory box	no	
oven material	carbon steel	stainless steel
side panel material	carbon steel	
oven bedplate thickness, mm	3	
oven size, mm	538x535x290	
baking tray dimensions, mm	470x530	
number of trays in the set, pcs	3	
length (with side countertops), mm	840 (1050)	
width (air duct), mm	850 (900)**	
height (air duct), mm	860 (940)**	

Logistic information

net, kg	142
gross, kg	194
packing length, mm	990
packing width, mm	1120
packing height, mm	1140

** air duct is optional




Electric range PE 49J

02

number of hot plates, pcs	4
hot plate size, mm	295x417
nominal rated power consumption, kW	16,8
hot plate power consumption, kW	3
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	yes
inventory box	no
oven material	stainless steel
side panel material	stainless steel
oven bedplate thickness, mm	3
oven size, mm	538x535x290
baking tray dimensions, mm	470x530
number of trays in the set, pcs	3
length (with side countertops), mm	840 (1050)
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	145
gross, kg	197
packing length, mm	990
packing width, mm	1120
packing height, mm	1140



Electric range PE 69J

69J


69J-01

number of hot plates, pcs	6	
hot plate size, mm	295x417	
nominal rated power consumption, kW	22,8	
hot plate power consumption, kW	3	
electric oven power consumption, kW	4,8	
temperature control range, °C	20-270	
overheating limiter	yes	
air duct	no**	
inventory box	no	
oven material	carbon steel	stainless steel
side panel material	carbon steel	
oven bedplate thickness, mm	3	
oven size, mm	538x535x290	
baking tray dimensions, mm	470x530	
number of trays in the set, pcs	3	
length (with side countertops), mm	1265 (1475)	
width (air duct), mm	850 (900)**	
height (air duct), mm	860 (940)**	

Logistic information

net, kg	205
gross, kg	262
packing length, mm	990
packing width, mm	1120
packing height, mm	1140

** air duct is optional




Electric range PE 69J

69J-02

number of hot plates, pcs	6
hot plate size, mm	295x417
nominal rated power consumption, kW	22,8
hot plate power consumption, kW	3
electric oven power consumption, kW	4,8
temperature control range, °C	20-270
overheating limiter	yes
air duct	yes
inventory box	no
oven material	stainless steel
side panel material	stainless steel
oven bedplate thickness, mm	3
oven size, mm	538x535x290
baking tray dimensions, mm	470x530
number of trays in the set, pcs	3
length (with side countertops), mm	1265 (1475)
width (air duct), mm	850 (900)
height (air duct), mm	860 (940)

Logistic information

net, kg	209
gross, kg	265
packing length, mm	990
packing width, mm	1120
packing height, mm	1140

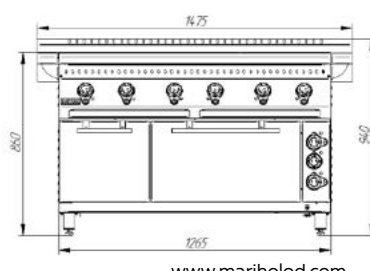




Oven ShJE 91	91	91-01	91-02
number of oven chambers, pcs	1		
nominal rated power consumption, kW	4,8		
rated voltage, V	230		
overheating limiter	yes		
oven material and stand	carbon steel	stainless	stainless
side panel material	carbon steel	carbon steel	stainless
oven size, mm	538x535x290		
baking tray dimensions, mm	530x470		
number of trays in the set, pcs	3		
oven bedplate thickness, mm	3		
length, mm	840		
width, mm	840		
height, mm	1080		

Logistic information


net, kg	95
gross, kg	140
packing length, mm	990
packing width, mm	1100
packing height, mm	1150

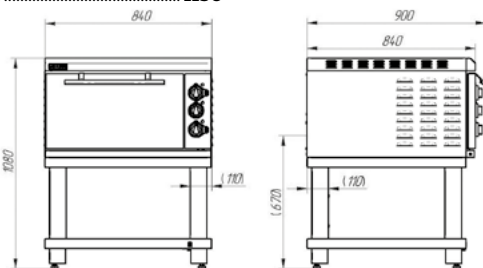

Oven ShJE 92	92	92-01	92-02
number of oven chambers, pcs	2		
nominal rated power consumption, kW	9,6		
rated voltage, V	400		
overheating limiter	yes		
oven material and stand	carbon steel	stainless	stainless
side panel material	carbon steel	carbon steel	stainless
oven size, mm	538x535x290		
baking tray dimensions, mm	530x470		
number of trays in the set, pcs	3		
oven bedplate thickness, mm	3		
length, mm	840		
width, mm	840		
height, mm	1510		

Logistic information


net, kg	155
gross, kg	205
packing length, mm	990
packing width, mm	1100
packing height, mm	1450

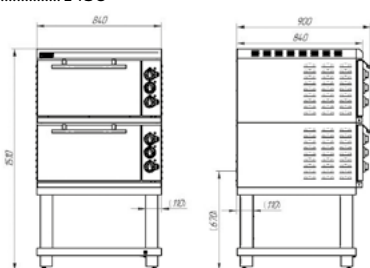

Oven ShJE 93	93	93-01	93-02
number of oven chambers, pcs	3		
nominal rated power consumption, kW	14,4		
rated voltage, V	400		
overheating limiter	yes		
oven material and stand	carbon steel	stainless	stainless
side panel material	carbon steel	carbon steel	stainless
oven size, mm	538x535x290		
baking tray dimensions, mm	530x470		
number of trays in the set, pcs	3		
oven bedplate thickness, mm	3		
length, mm	840		
width, mm	840		
height, mm	1500		

Logistic information

net, kg	195
gross, kg	235
packing length, mm	990
packing width, mm	1100
packing height, mm	1660

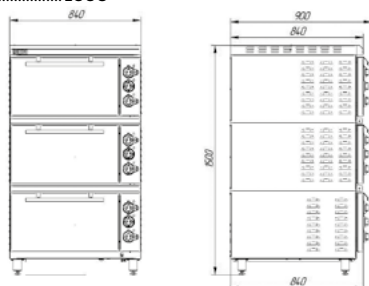



KPET 60/9

nominal rated power consumption, kW	9
number of heating elements, pcs	1
rated voltage, V	400
nominal working volume, l	60
water heating up time, min. not more than	45
pressure in steam water jacket, kPa	20-45
safety valve	yes
electric contact pressure gauge	yes
dry run sensor (electrode)	yes
length, mm	640
width with tap, mm	900 (1015)
height, mm	860

Logistic information

net, kg	100
gross, kg	140
packing length, mm	600
packing width, mm	1150
packing height, mm	1150



KPET 100/9

nominal rated power consumption, kW	18
number of heating elements, pcs	2
rated voltage, V	400
nominal working volume, l	100
water heating up time, min. not more than	55
pressure in steam water jacket, kPa	20-45
safety valve	yes
electric contact pressure gauge	yes
dry run sensor (electrode)	yes
length, mm	840
width with tap, mm	900 (1015)
height, mm	860

Logistic information

net, kg	121
gross, kg	173
packing length, mm	990
packing width, mm	1150
packing height, mm	1150



KPET 160/9

nominal rated power consumption, kW	18
number of heating elements, pcs	2
rated voltage, V	400
nominal working volume, l	160
water heating up time, min. not more than	60
pressure in steam water jacket, kPa	20-45
safety valve	yes
electric contact pressure gauge	yes
dry run sensor (electrode)	yes
length, mm	840
width with tap, mm	900 (1015)
height, mm	860

Logistic information

net, kg	127
gross, kg	179
packing length, mm	990
packing width, mm	1150
packing height, mm	1150






KPET 250/9

nominal rated power consumption, kW	18
number of heating elements, pcs	2
rated voltage, V	400
nominal working volume, l	250
water heating up time, min. not more than	80
pressure in steam water jacket, kPa	20-45
safety valve	yes
electric contact pressure gauge	yes
dry run sensor (electrode)	yes
length, mm	840
width with tap, mm	900 (1015)
height, mm	1105

Logistic information

net, kg	150
gross, kg	220
packing length, mm	990
packing width, mm	1150
packing height, mm	1500

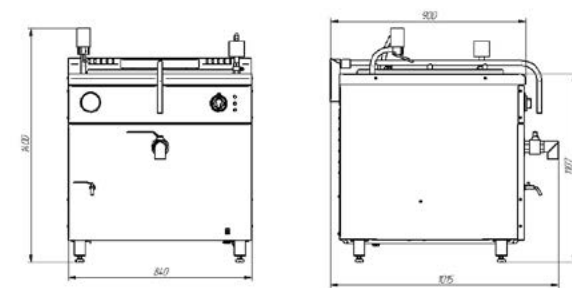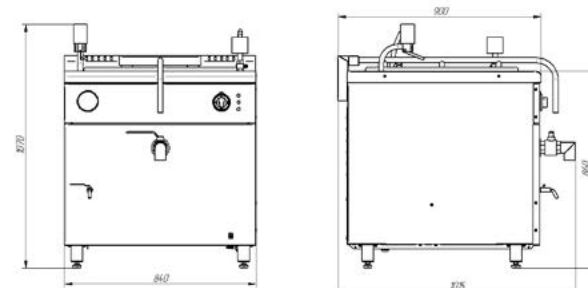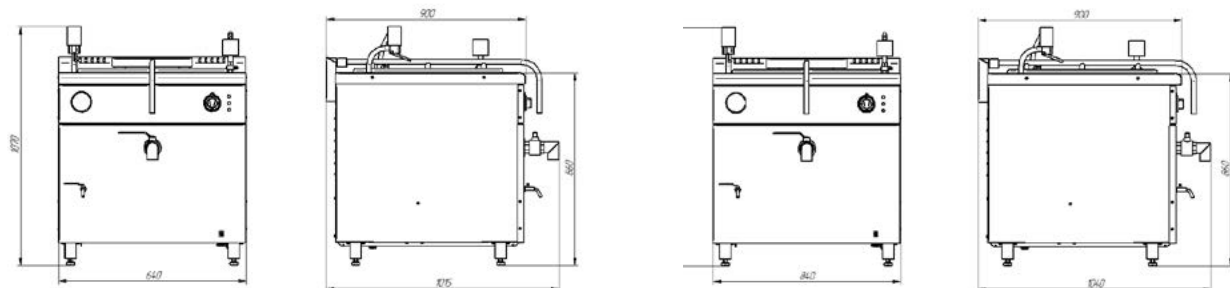




**BAKING AND
PROOFING CABINETS**



Baking oven ShRE 101

number of baking chambers, pcs	1
nominal rated power consumption, kW	5,2
rated voltage, V	230
emperature control range, °C	20-270
overheating limiter	yes
internal material	carbon steel
stand and side panel material	stainless steel
internal dimensions of the baking chamber, mm	1000x800x180
backstone thickness, mm	3/20
oven chamber capacity, pc	24 of loaf moulds No.7
length, mm	1300
width, mm	1025 (1080)
height, mm	1010


* bakery stone felsite

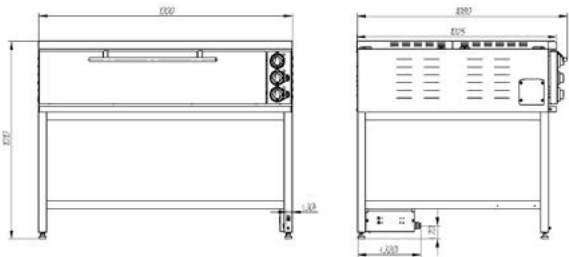

Baking oven ShRE 102

number of baking chambers, pcs	2
nominal rated power consumption, kW	10,4
rated voltage, V	400
emperature control range, °C	20-270
overheating limiter	yes
internal material	carbon steel
stand and side panel material	stainless steel
internal dimensions of the baking chamber, mm	1000x800x180
backstone thickness, mm	3/20
oven chamber capacity, pc	24 of loaf moulds No.7
length, mm	1300
width, mm	1025 (1080)
height, mm	1330


* bakery stone felsite

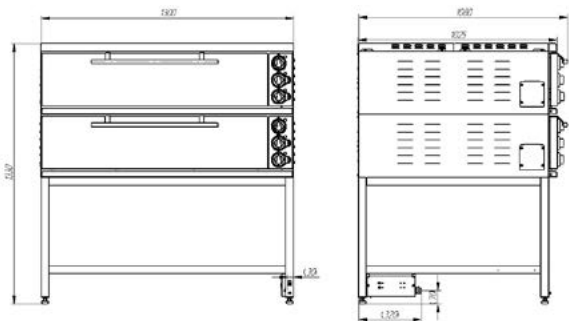

Baking oven ShRE 103

number of baking chambers, pcs	3
nominal rated power consumption, kW	15,6
rated voltage, V	400
emperature control range, °C	20-270
overheating limiter	yes
internal material	carbon steel
stand and side panel material	stainless steel
internal dimensions of the baking chamber, mm	1000x800x180
backstone thickness, mm	3/20
oven chamber capacity, pc	24 of loaf moulds No.7
length, mm	1300
width, mm	1025 (1080)
height, mm	1660


* bakery stone felsite

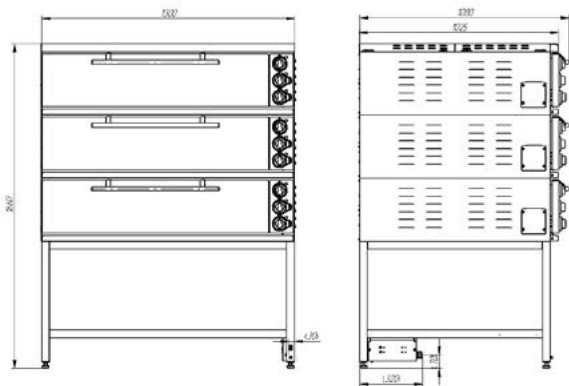

Baking oven ShRE 104

number of baking chambers, pcs	4
nominal rated power consumption, kW	20,8
rated voltage, V	400
emperature control range, °C	20-270
overheating limiter	yes
internal material	carbon steel
stand and side panel material	stainless steel
internal dimensions of the baking chamber, mm	1000x800x180
backstone thickness, mm	3/20
oven chamber capacity, pc	24 of loaf moulds No.7
length, mm	1300
width, mm	1025 (1080)
height, mm	1680

* bakery stone felsite

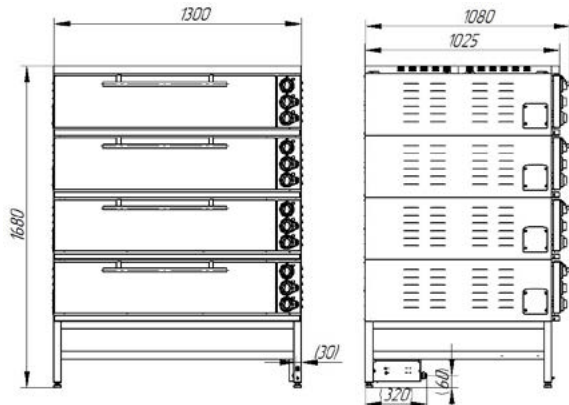



Bakery bedplate stone (felsite)

length, mm	380
width, mm	495
height, mm	20

Logistic information

net, kg	9
gross, kg	10
packing length, mm	420
packing width, mm	540
packing height, mm	40

Proofing cabinet ShRE104

nominal rated power consumption, kW	1,25
heating element power consumption, kW	1,2
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	4
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	48
roof	yes
legs, 180 mm	no
removable stand 650 mm	yes
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	1190

Logistic information

net, kg	145
gross, kg	213
packing length, mm	1460
packing width, mm	1250
packing height, mm	1390




Proofing cabinet ShRE104-01

nominal rated power consumption, kW	1,25
heating element power consumption, kW	1,2
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	4
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	48
roof	no
legs, 180 mm	yes
removable stand 650 mm	no
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	680

Logistic information

net, kg	106
gross, kg	172
packing length, mm	1460
packing width, mm	1250
packing height, mm	890




Proofing cabinet ShRE104-02

nominal rated power consumption, kW	1,25
heating element power consumption, kW	1,2
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	4
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	48
roof	no
legs, 180 mm	no
removable stand 650 mm	no
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	500

Logistic information

net, kg	102
gross, kg	168
packing length, mm	1460
packing width, mm	1250
packing height, mm	740





Proofing cabinet ShRE106

nominal rated power consumption, kW	1,65
heating element power consumption, kW	1,6
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	6
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	72
roof	yes
legs, 180 mm	no
removable stand 650 mm	yes
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	1340

Logistic information

net, kg	164
gross, kg	231
packing length, mm	1460
packing width, mm	1250
packing height, mm	1540




Proofing cabinet ShRE106-01

nominal rated power consumption, kW	1,65
heating element power consumption, kW	1,6
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	6
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	72
roof	no
legs, 180 mm	yes
removable stand 650 mm	no
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	830

Logistic information

net, kg	127
gross, kg	190
packing length, mm	1460
packing width, mm	1250
packing height, mm	1040




Proofing cabinet ShRE106-02

nominal rated power consumption, kW	1,65
heating element power consumption, kW	1,6
light power consumption, kW	0,05
rated voltage, V	230
temperature control range, °C	30-90
number of baths for water, pcs	2
number of grid shelves, pcs	6
working chamber material	stainless steel
door material	tempered glass
grid shelves dimensions, mm	720x500
number of loaf moulds No.7	72
roof	no
legs, 180 mm	no
removable stand 650 mm	no
stand material	stainless steel
length, mm	1300
width, mm	1025
height, mm	630

Logistic information

net, kg	123
gross, kg	187
packing length, mm	1460
packing width, mm	1250
packing height, mm	890



**FOOD SELF-SERVICE
MODULAR LINE**





PPS 6

number of cutlery containers	4
bread storage tray	no
bread storage tray lid	no
inventory box	yes
height-adjustable legs	yes
length, mm	630
width, mm	675
height, mm	1245

Logistic information



net, kg	34
gross, kg	60
packing length, mm	830
packing width, mm	790
packing height, mm	855

PPSH 6

number of cutlery containers	4
bread storage tray	yes
bread storage tray lid	yes
inventory box	yes
height-adjustable legs	yes
length, mm	630
width, mm	675
height, mm	1410

Logistic information

net, kg	36
gross, kg	62
packing length, mm	830
packing width, mm	790
packing height, mm	855

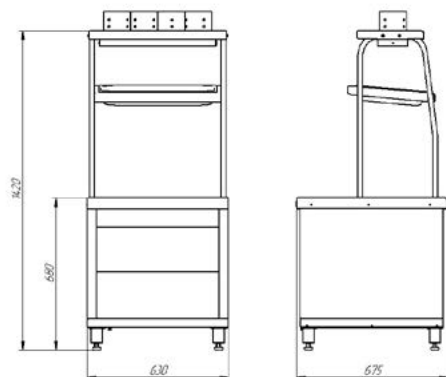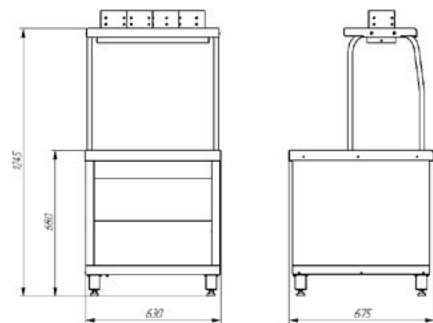


PVHE 11

rated voltage, V	230
showcase useful capacity, m³	0,5
cooled volume temperature, °C	+5...+15
inventory box	yes
diode lighting	yes
length, mm	1120
width depth (with guides), mm	705 (1030)
height, mm	1720

Logistic information

net, kg	155
gross, kg	210
packing length, mm	1350
packing width, mm	850
packing height, mm	1910

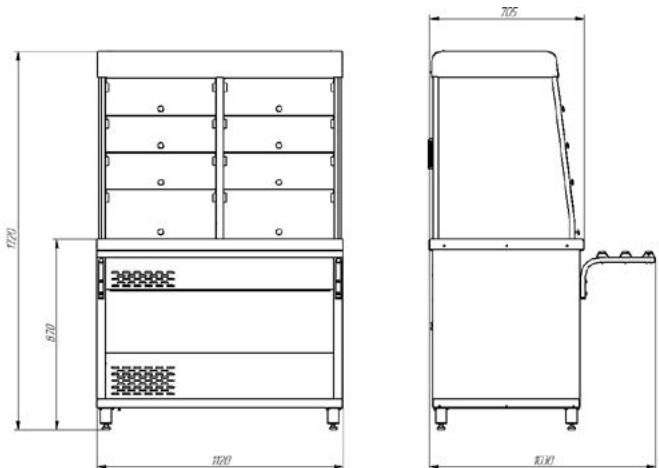


PVHE 15

rated voltage, V	230
showcase useful capacity, m³	0,7
cooled volume temperature, °C	+5...+15
inventory box	yes
diode lighting	yes
length, mm	1500
width depth (with guides), mm	705 (1030)
height, mm	1720

Logistic information

net, kg	185
gross, kg	245
packing length, mm	1730
packing width, mm	850
packing height, mm	1910

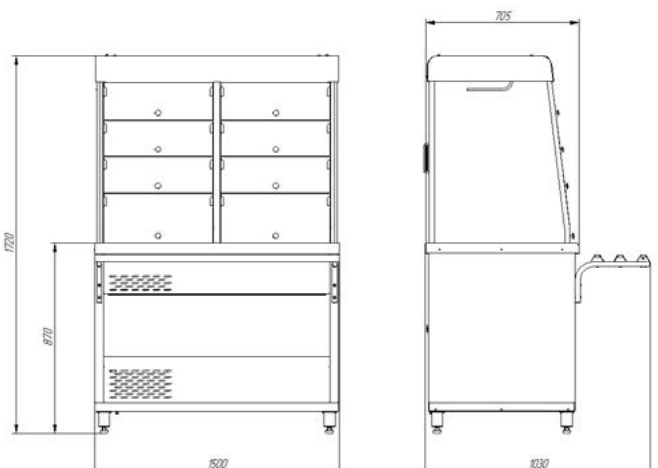



PMPE 11

hot plate power consumption, kW	2
number of hot plates, pcs	2
number of hot plate operating modes, pcs	3
size of hot plates, mm	220
number of shelves	1
anti-coughing screen	yes
length, mm	1120
width (with guides), mm	705 (1030)
height, mm	1245

Logistic information



net, kg	100
gross, kg	140
packing length, mm	1350
packing width, mm	850
packing height, mm	1500

PMPE 15

hot plate power consumption, kW	3
number of hot plates, pcs	3
number of hot plate operating modes, pcs	3
size of hot plates, mm	220
number of shelves	1
anti-coughing screen	yes
length, mm	1500
width (with guides), mm	705 (1030)
height, mm	1245

Logistic information

net, kg	115
gross, kg	155
packing length, mm	1730
packing width, mm	850
packing height, mm	1500

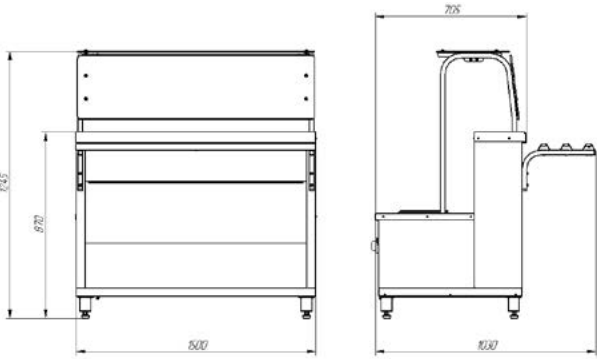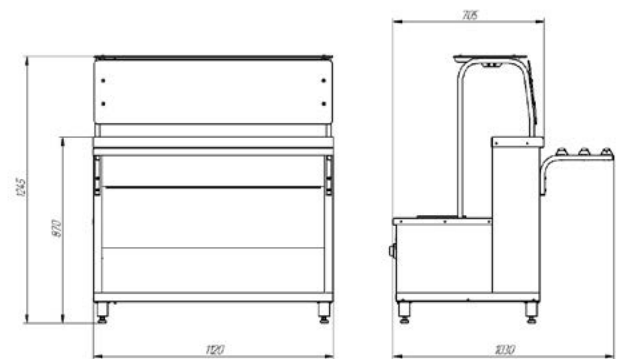


PMVE 11

light power consumption, kW	2
number of heating elements, pcs	2
water temperature in the bath, °C not more than	85
number of shelves	2
GN containers in the set, pcs	6
anti-coughing screen	yes
lighting	yes
length, mm	1120
width (with guides), mm	705 (1030)
height, mm	1480

Logistic information

net, kg	109
gross, kg	159
packing length, mm	1350
packing width, mm	850
packing height, mm	1910

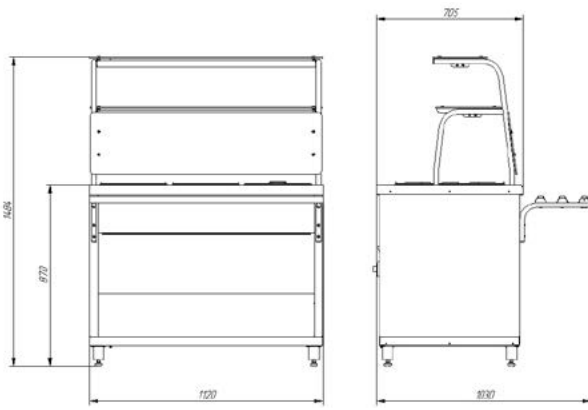


PMVE 15

light power consumption, kW	3
number of heating elements, pcs	3
water temperature in the bath, °C not more than	85
number of shelves	2
GN containers in the set, pcs	7
anti-coughing screen	yes
lighting	yes
length, mm	1500
width (with guides), mm	705 (1030)
height, mm	1480

Logistic information

net, kg	137
gross, kg	187
packing length, mm	1730
packing width, mm	850
packing height, mm	1910

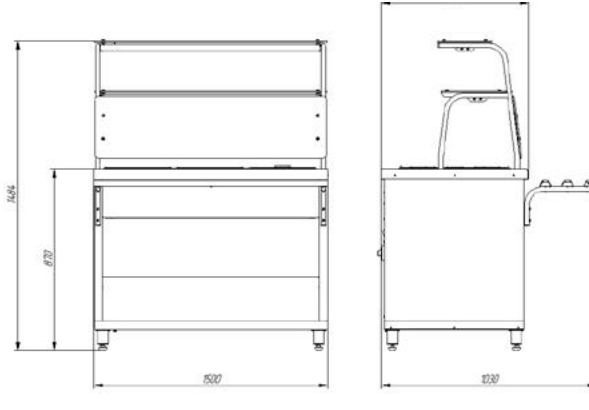



PN 11

number of electric sockets, pcs	2
inventory box	yes
length, mm	1120
width (with guides), mm	705 (1030)
height, mm	870

Logistic information

net, kg	65
gross, kg	105
packing length, mm	1350
packing width, mm	850
packing height, mm	1000



PN 15

number of electric sockets, pcs	2
inventory box	yes
length, mm	1150
width (with guides), mm	705 (1030)
height, mm	870

Logistic information

net, kg	85
gross, kg	130
packing length, mm	1730
packing width, mm	850
packing height, mm	1000



PNP 11

diode lightning	yes
number of shelves, шт	2
number of electric sockets, pcs	2
inventory box	yes
length, mm	1120
width (with guides), mm	705 (1030)
height, mm	870

Logistic information

net, kg	85
gross, kg	140
packing length, mm	1350
packing width, mm	850
packing height, mm	1910







PNP 15

diode lightning	yes
number of shelves, шт	2
number of electric sockets, pcs	2
inventory box	yes
length, mm	1500
width (with guides), mm	705 (1030)
height, mm	870

Logistic information

net, kg	108
gross, kg	168
packing length, mm	1730
packing width, mm	850
packing height, mm	1910

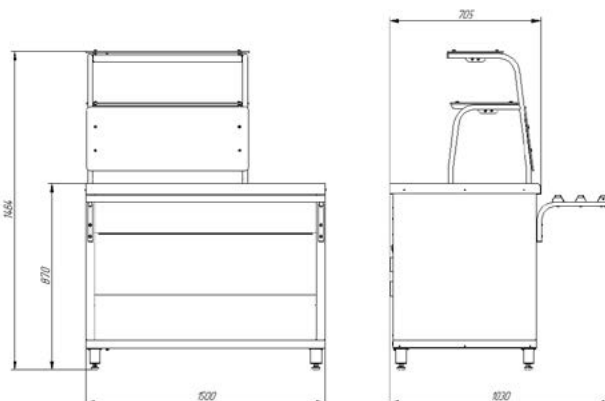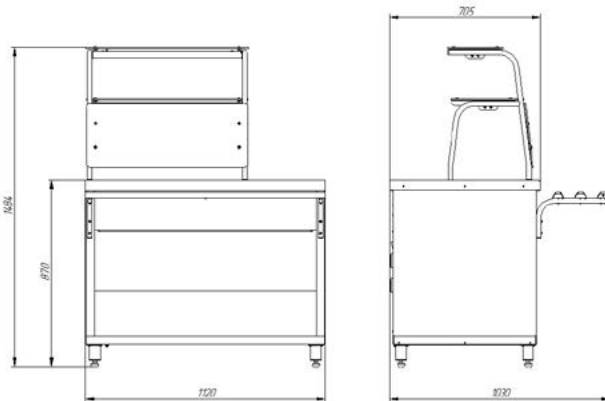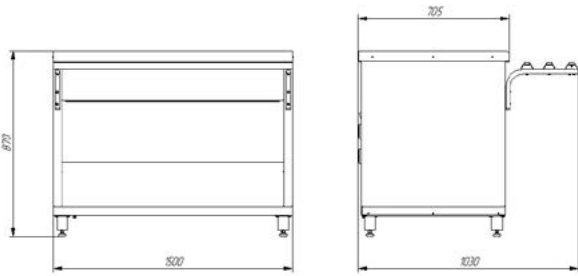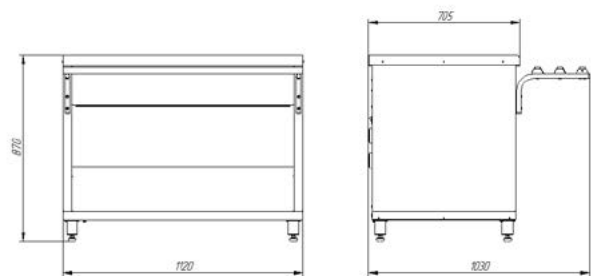




PK 11

possibility of installation in left/right direction	yes
number of electric sockets, pcs	1
length, mm	1120
width (with guides), mm	705 (1030)
height, mm	870

Logistic information

net, kg	55
gross, kg	85
packing length, mm	1350
packing width, mm	850
packing height, mm	1500

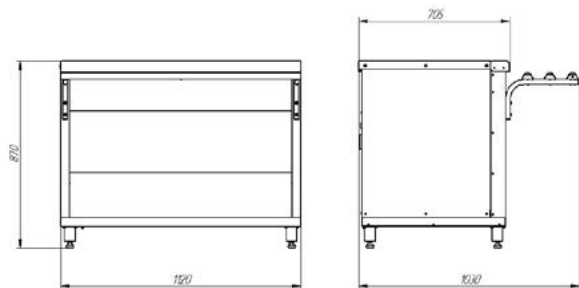



«Contact», JSC
133 Karla Marksa Street Yoshkar-Ola,
the Republic of Mari El, 424026
phone: + 7 (8362) 45-08-95, 45-06-70, 45-27-90
tnp@zavod-kontakt.ru

 mariholod.com

 [mariholodmash.official](https://www.instagram.com/mariholodmash.official)